



TABLE OF CONTENTS

Product Information

General Information.....	2
Handing & Operation.....	3
Unit Sizing.....	4

Options


Divided Lite Options.....	5
Trim & Sill Options.....	6
Frame Expander Options.....	7
Jamb Extender Options.....	8
Mullion Options.....	10

Section Details

Operator:	
Vertical Section.....	11
Horizontal Section.....	12
Vertical Section – No Screen Option.....	13
Horizontal Section – No Screen Option.....	14
Picture:	
Vertical Section.....	15
Horizontal Section.....	16
Radius Head Operator:	
Vertical Section.....	17
Horizontal Section.....	18



GENERAL INFORMATION

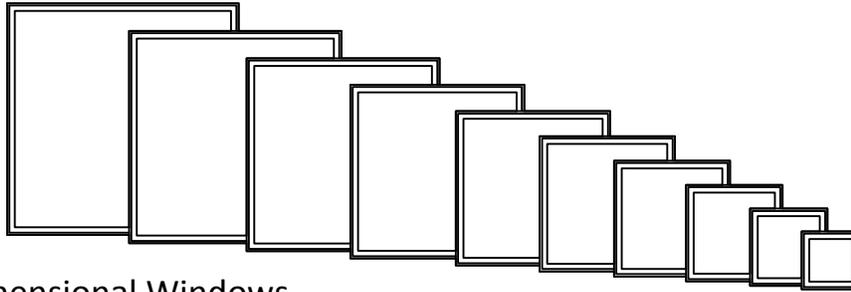


Dimensional Windows

EpicVue Casement Windows may be specified as "dimensional", by adjusting the desired rough opening width or height in 1/16" increments from standard.

EpicVue Casement Windows are available with left or right hand operation, or stationary (non-venting). Operating mechanism includes corrosion resistant steel hinges and dual arm roto-type operator with hardened steel gears and operating arms. Sash locks are concealed unison type with an exposed locking lever and escutcheon plate. There are several interior hardware finish options. Refer to the Specifications for finish options.


Multiple Assemblies

EpicVue Casement Windows may be mullled above, below, or beside other clad casement windows, or other clad window products. Factory assembled mulls are limited in height (100"), width (150").

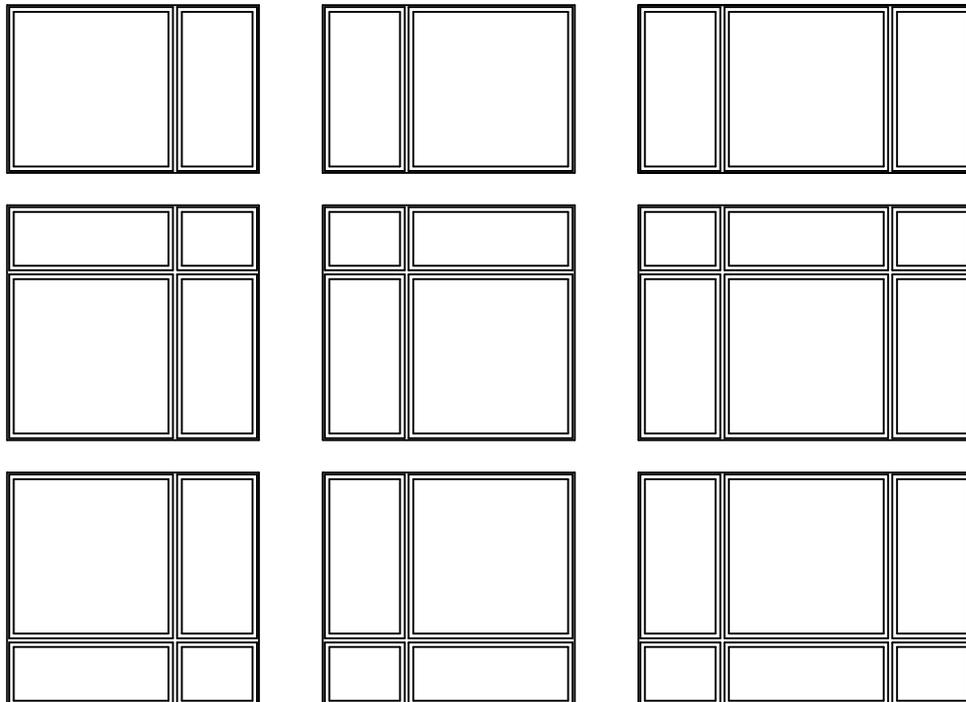






VENT PROJECTIONS

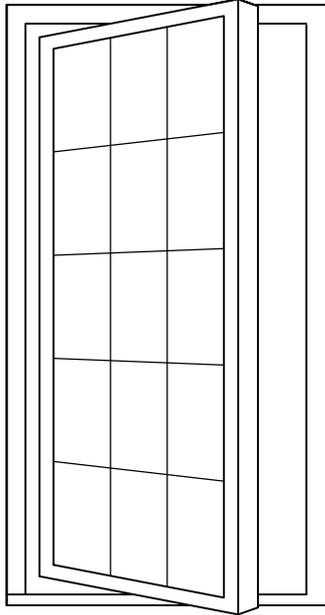

Left Hand

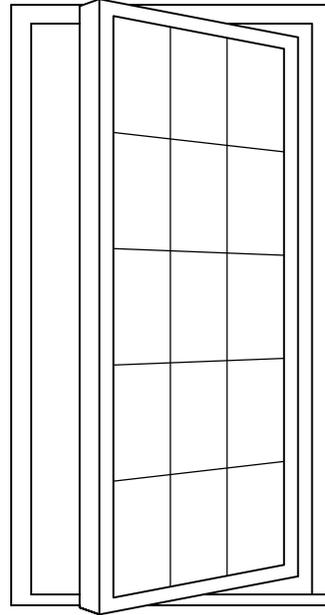

Right Hand

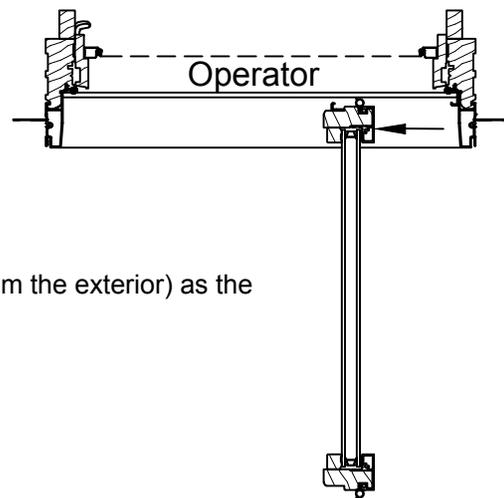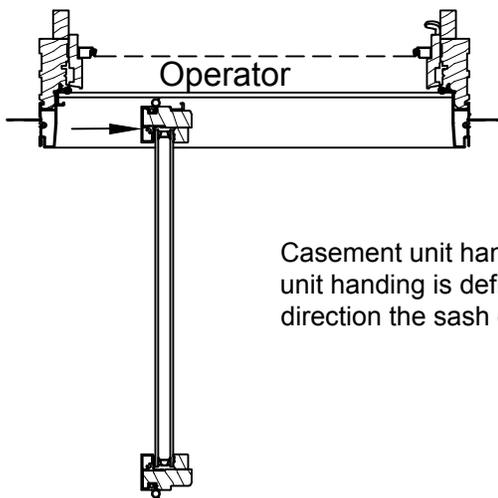

Casement unit handing:
unit handing is defined (from the exterior) as the
direction the sash opens.



UNIT SIZING

General Notes:

Unit size is always the maximum size of the window with or without trim and does not include nail fin.

Masonry Opening:


Masonry opening is always 1/2" over (height and width) the unit size or the outside of the trim of the window.

Rough Opening:


Rough opening is always 3/4" over frame size of the window.

Horizontal Section With Trim On All Sides

Dimensions Apply To Both Vertical And Horizontal Window Frame

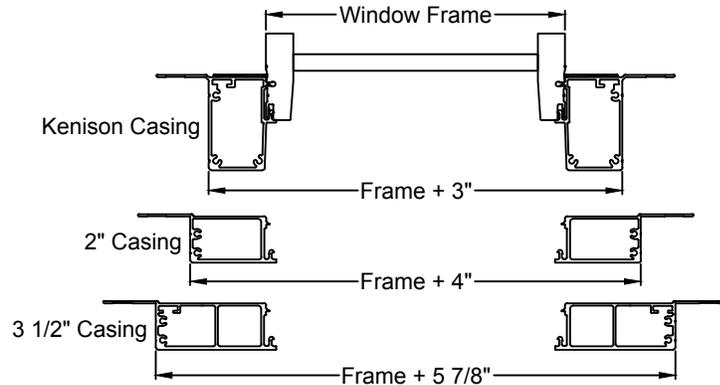


Vertical Sections With Trim On 3 Sides

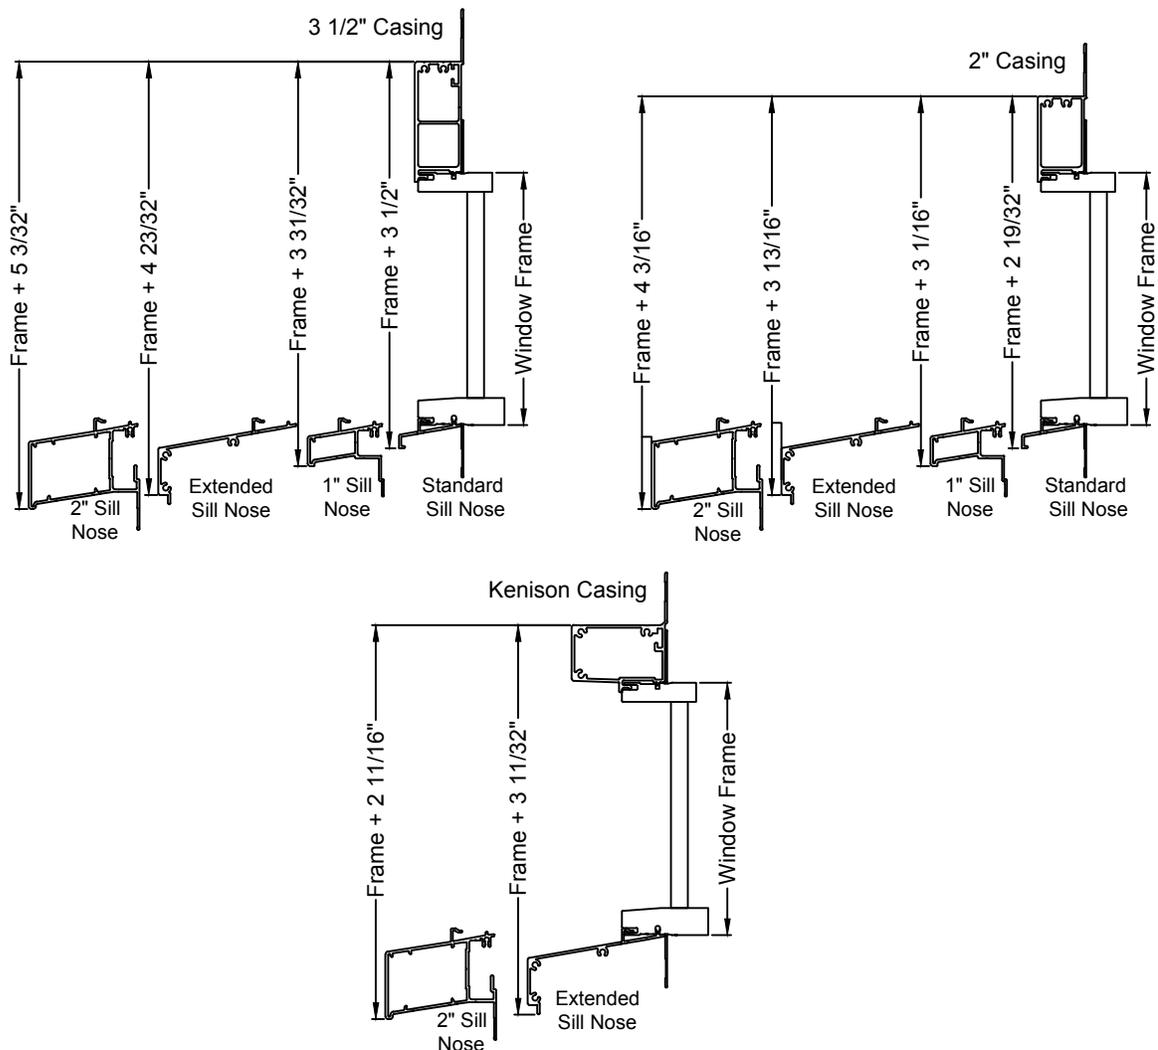




DIVIDED LITE OPTIONS

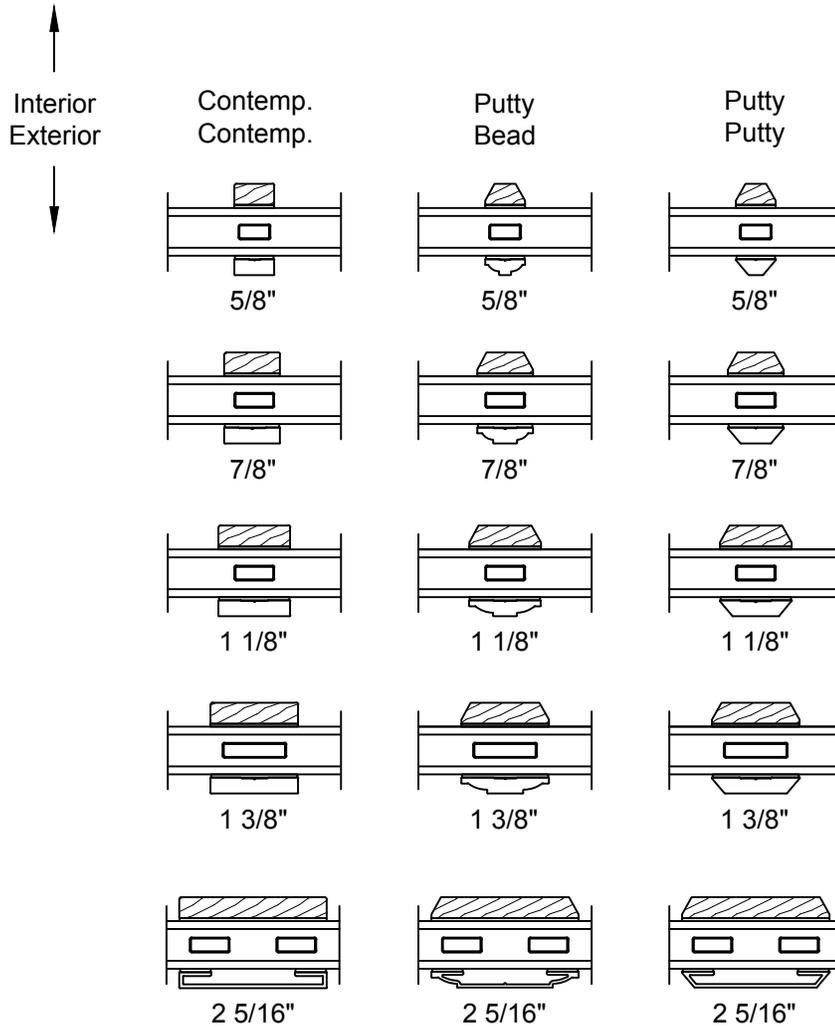


NOTE: Each exterior SDL bar style can be paired with either Contemporary or Putty interior SDL bars.



TRIM & SILL OPTIONS

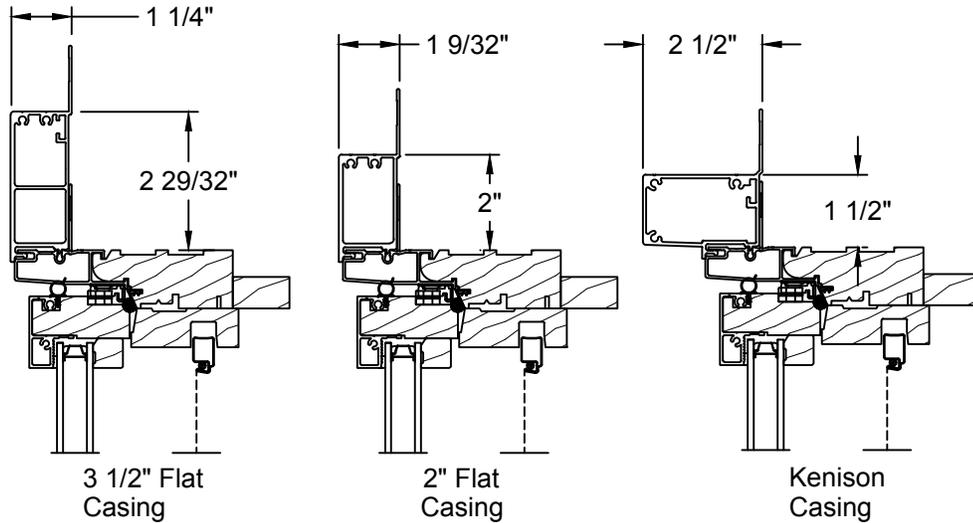


Sill Nose Options

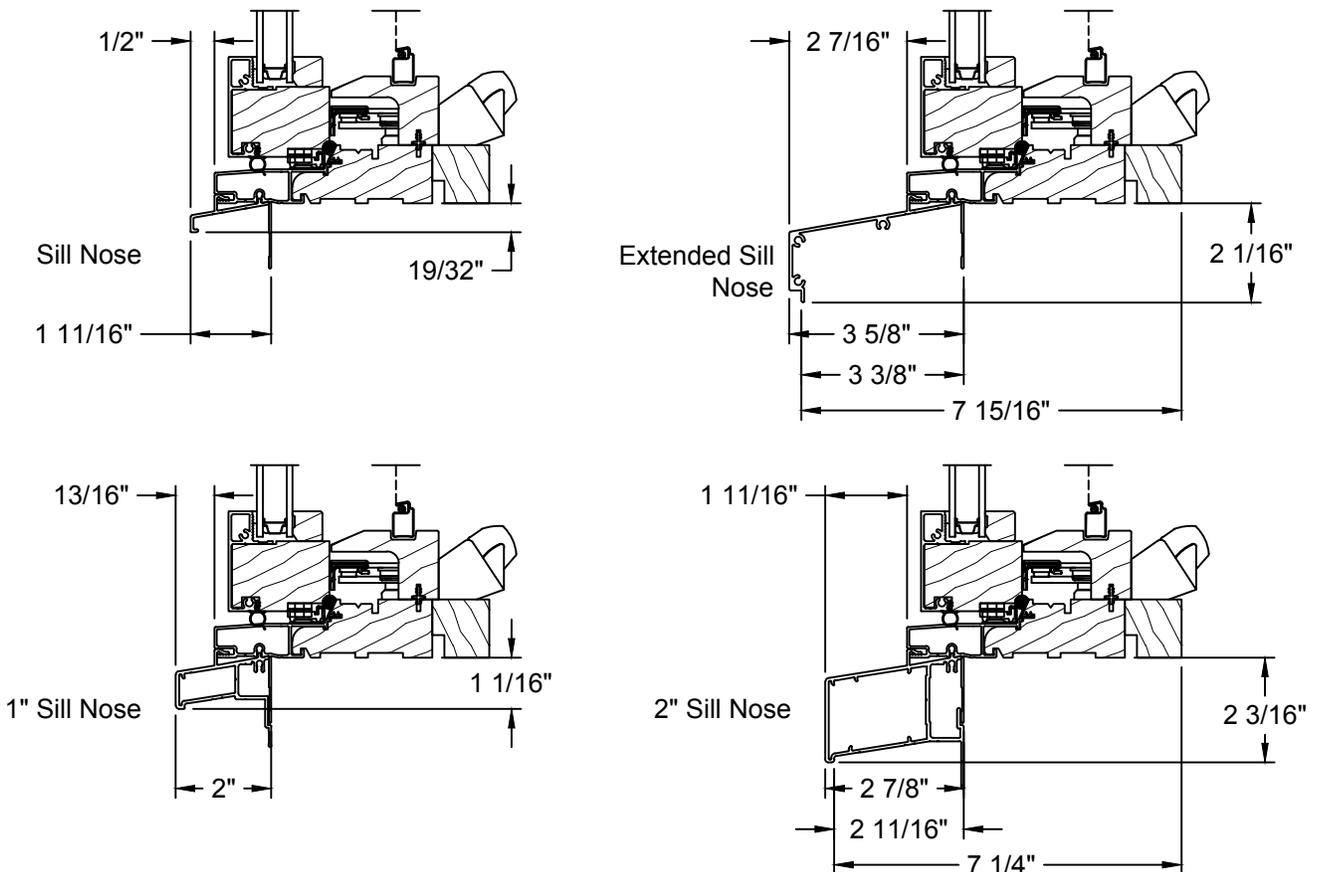




FRAME EXPANDER OPTIONS

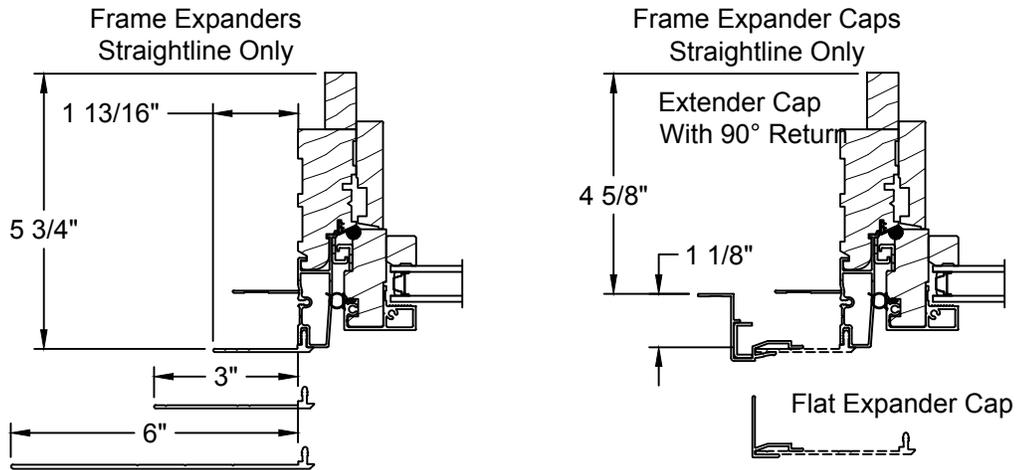


Snap Trim Options

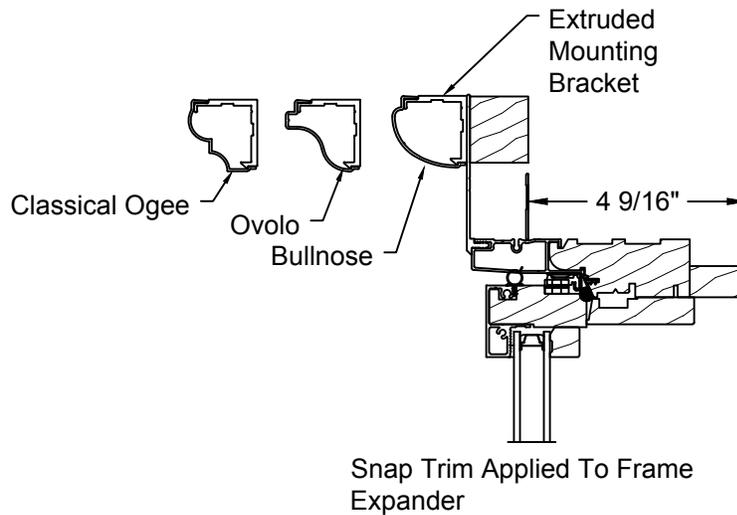




JAMB EXTENDER OPTIONS


4 9/16" Wall

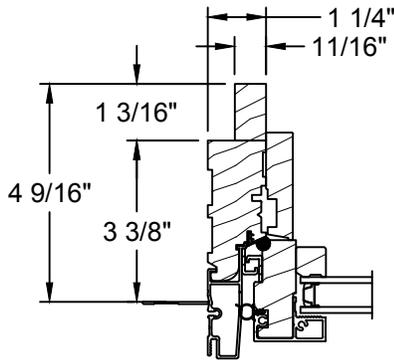

Standard 4/4
Jamb Extender

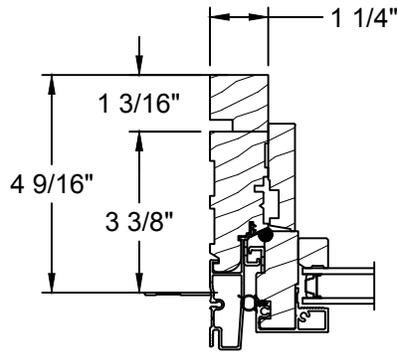


Standard 5/4
Jamb Extender

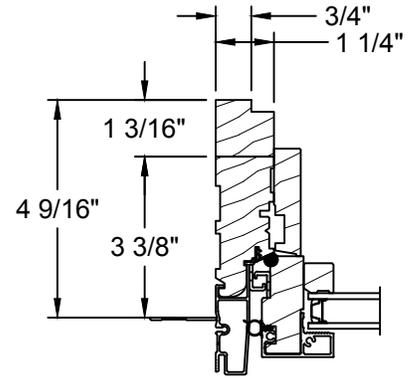


5/4 To 4/4 Reveal
Jamb Extender


6 9/16" Wall

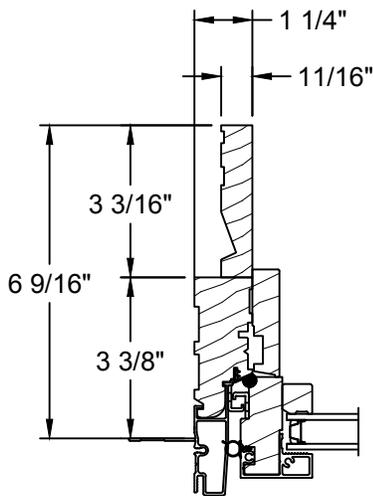

Standard 4/4
Jamb Extender

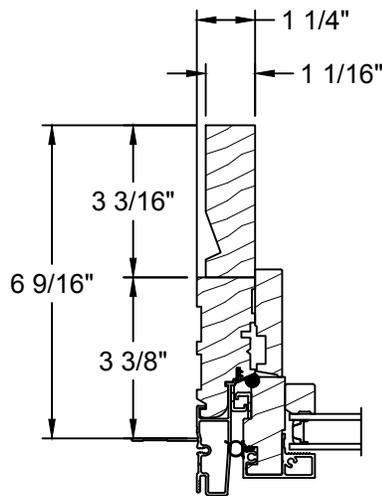


Standard 5/4
Jamb Extender

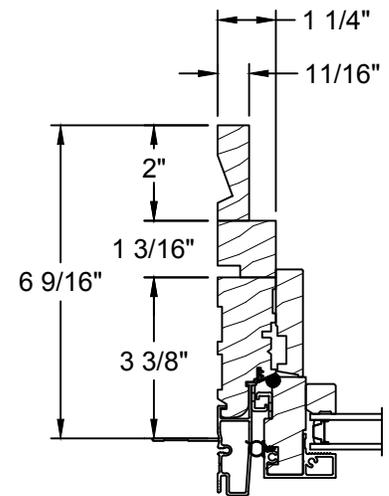


5/4 To 4/4 Reveal
Jamb Extender




JAMB EXTENDER OPTIONS

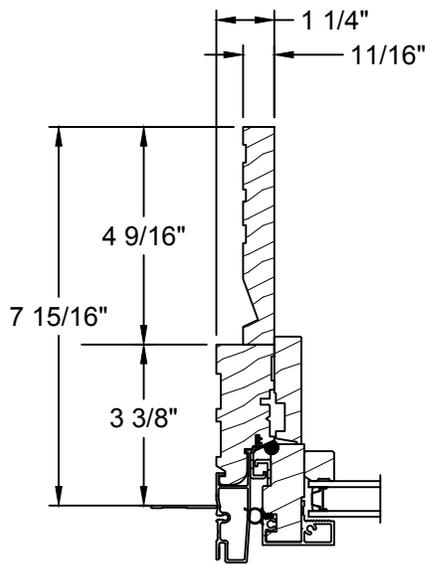

Standard 4/4
Jamb Extender

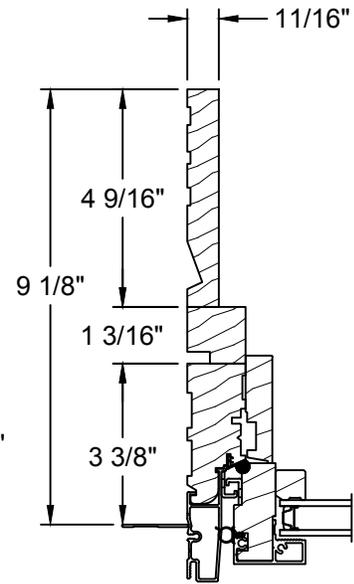


5/4 To 4/4 Reveal
Jamb Extender

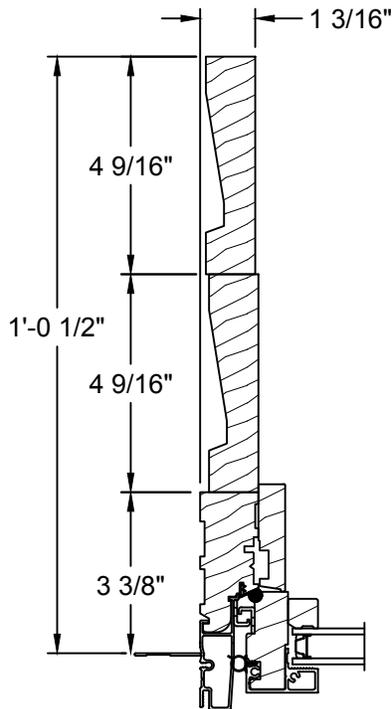


Standard 5/4
Jamb Extender




MULLION OPTIONS

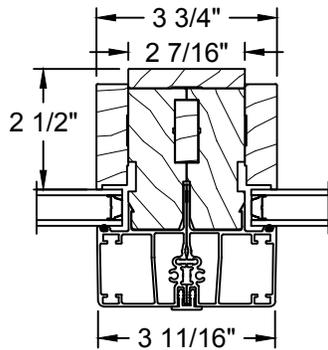


Direct Set/direct Set

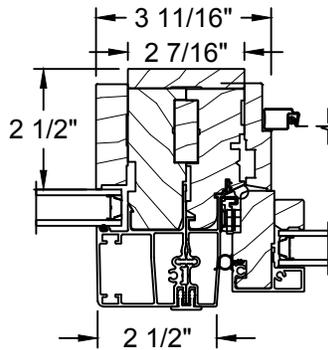


Direct Set/casement

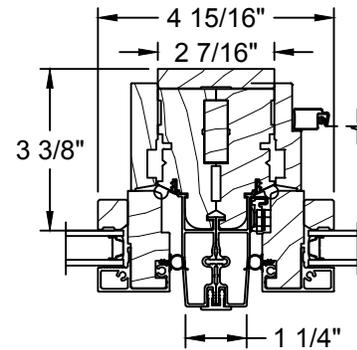


Fixed Casement/casement

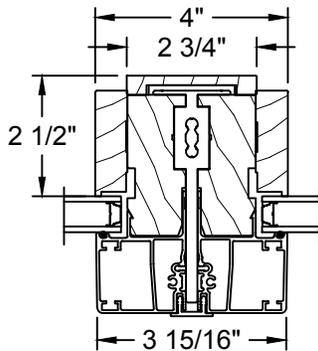


Direct Set/direct Set
1/4" Structural

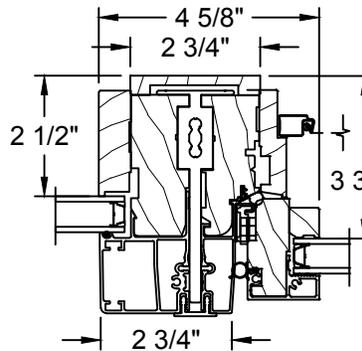


Direct Set/casement
1/4" Structural

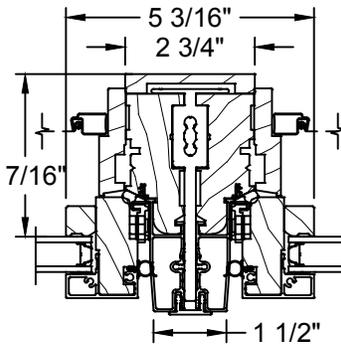


Casement/casement
1/4" Structural

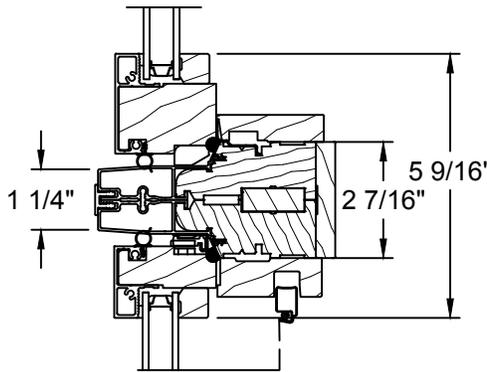

Head/sill

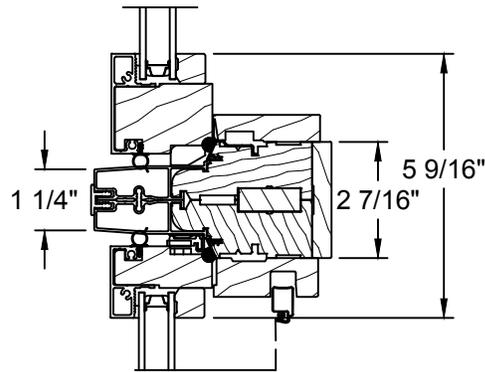


Fixed Casement/casement

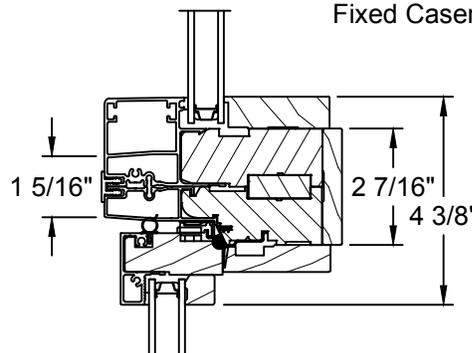

Direct Set/casement




OPERATOR - VERTICAL SECTION

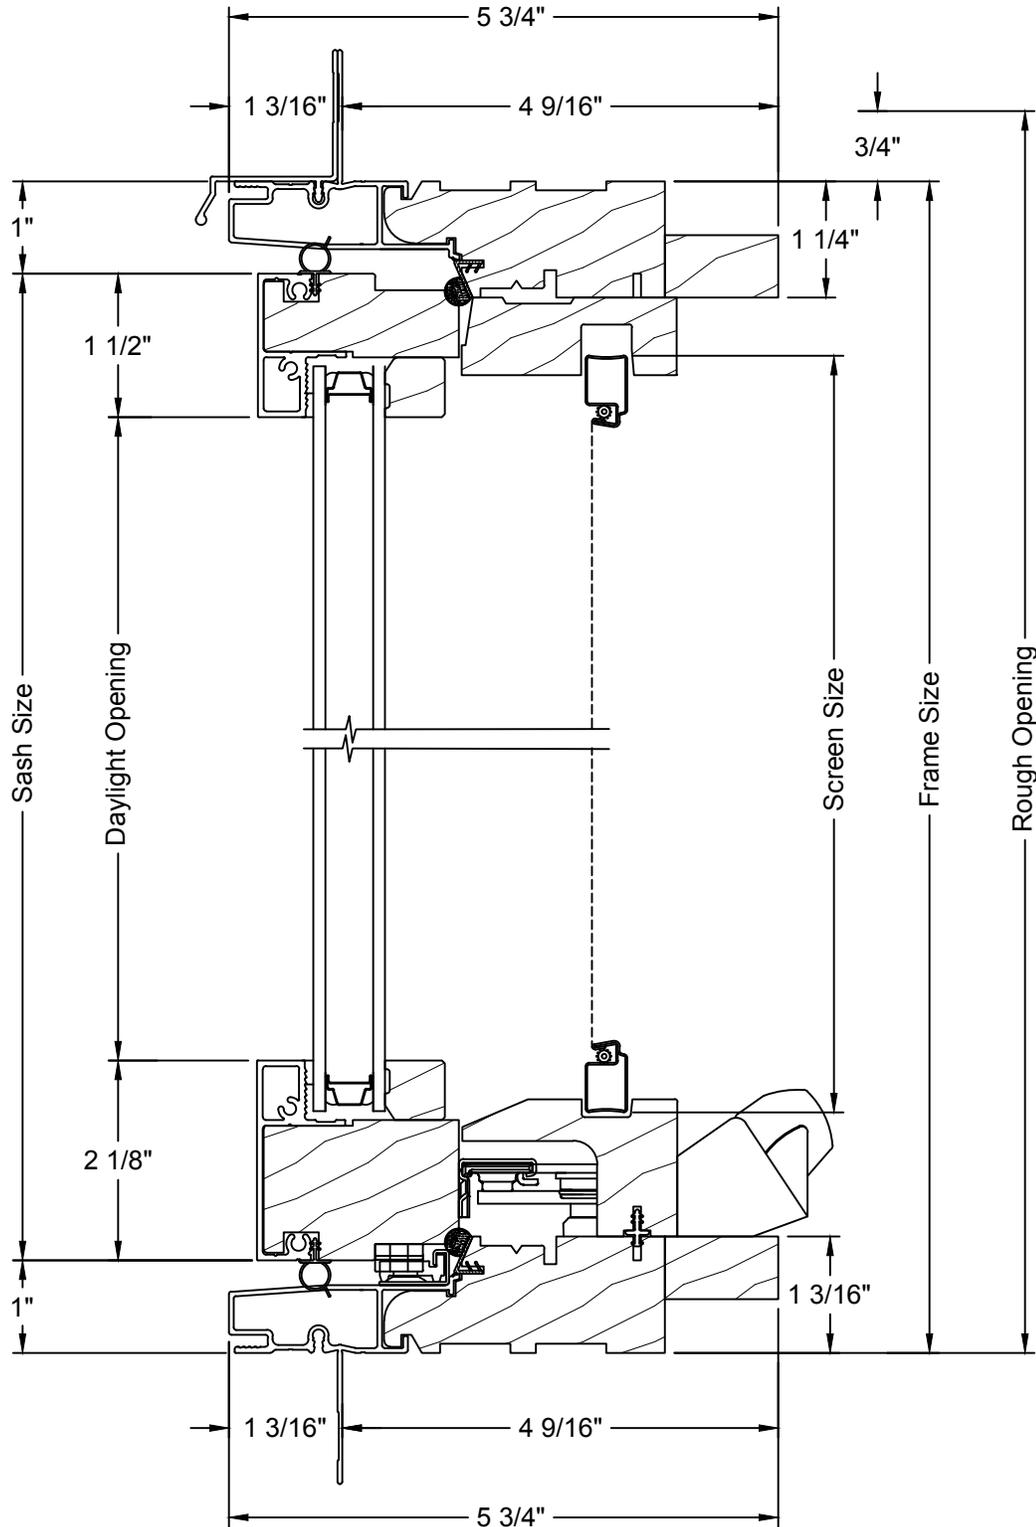




OPERATOR - HORIZONTAL SECTION

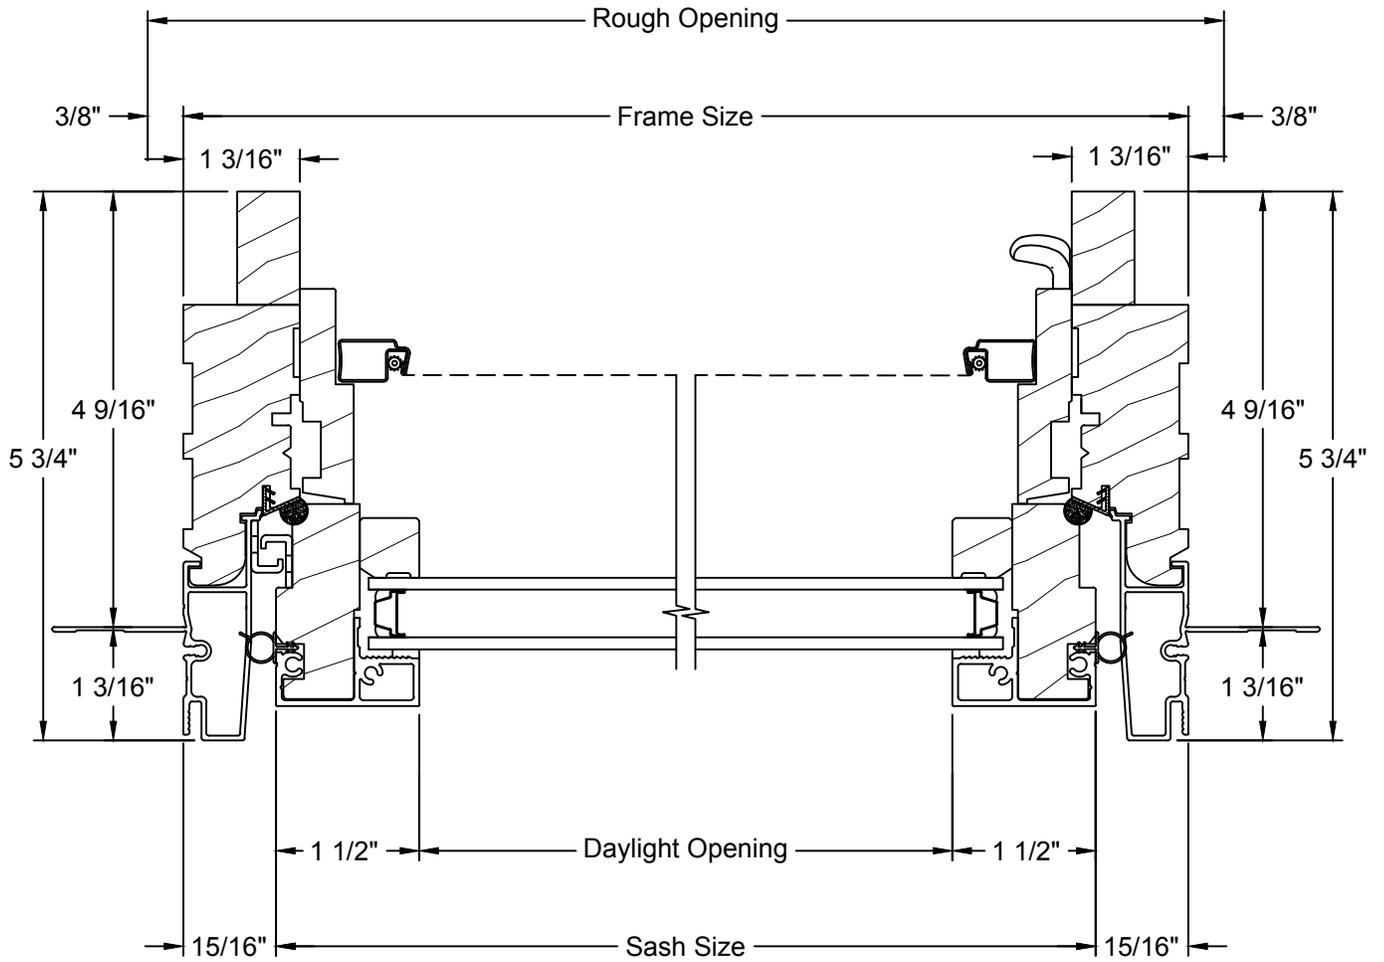




OPERATOR - NO SCREEN OPTION - VERTICAL SECTION

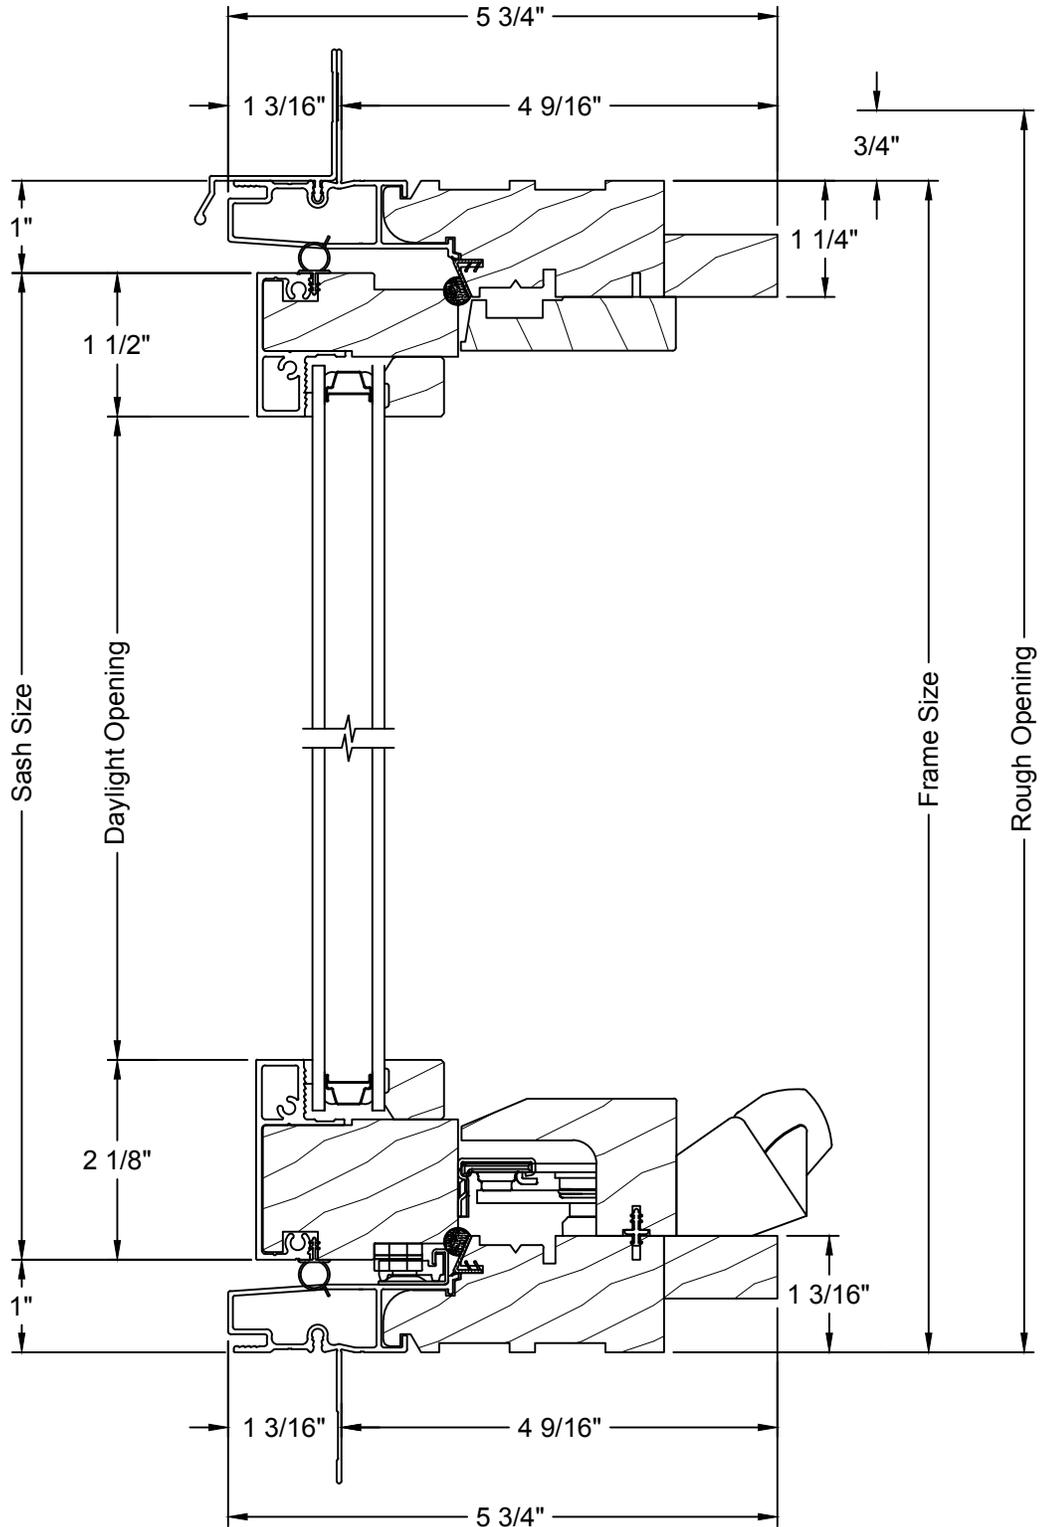




OPERATOR - NO SCREEN OPTION - HORIZONTAL SECTION

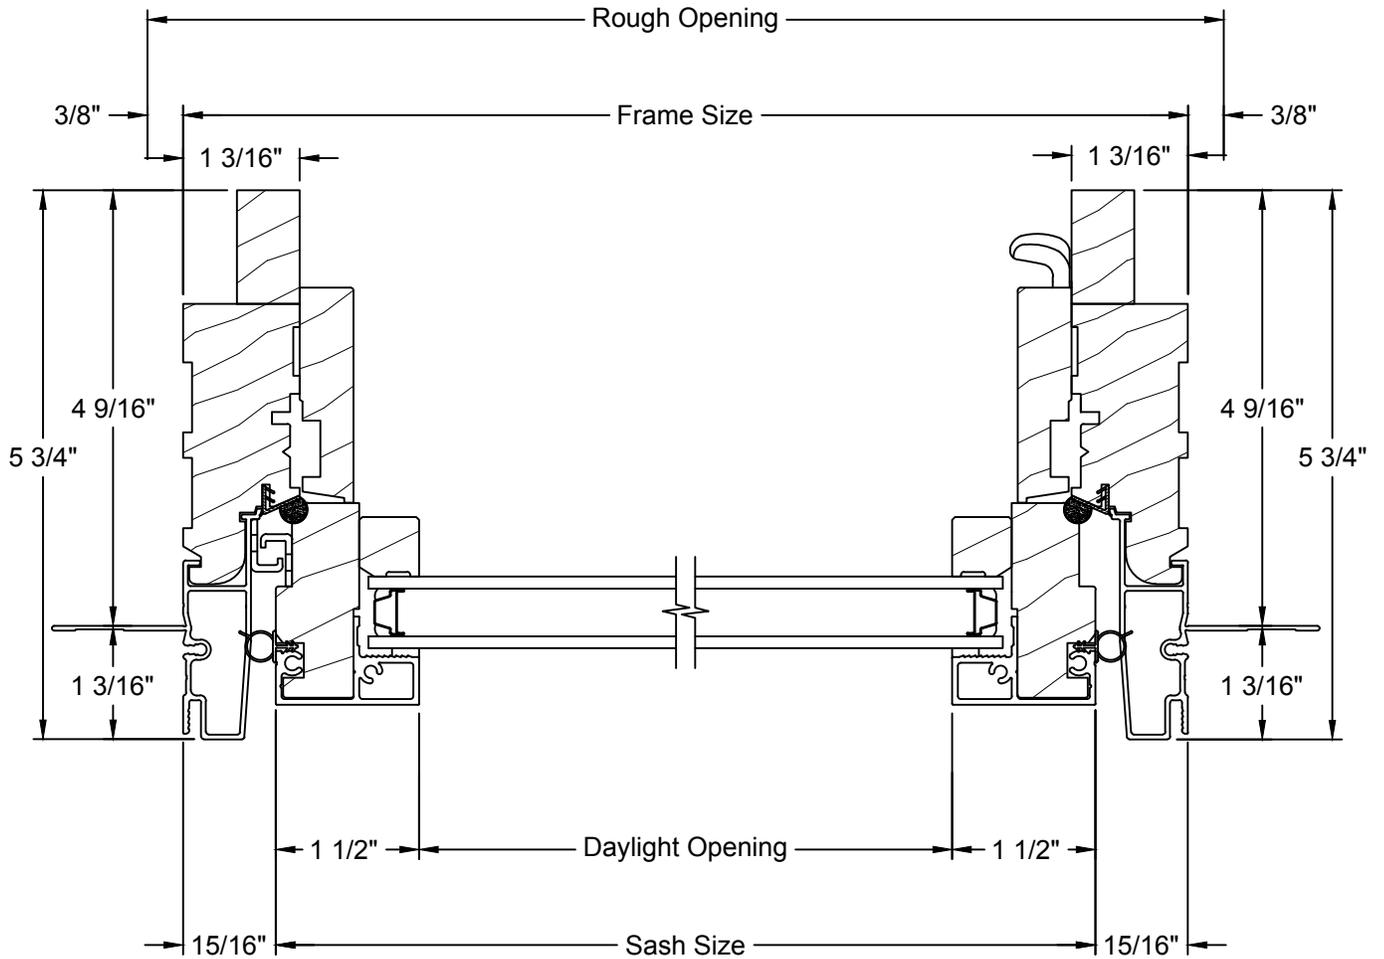




PICTURE - VERTICAL SECTION

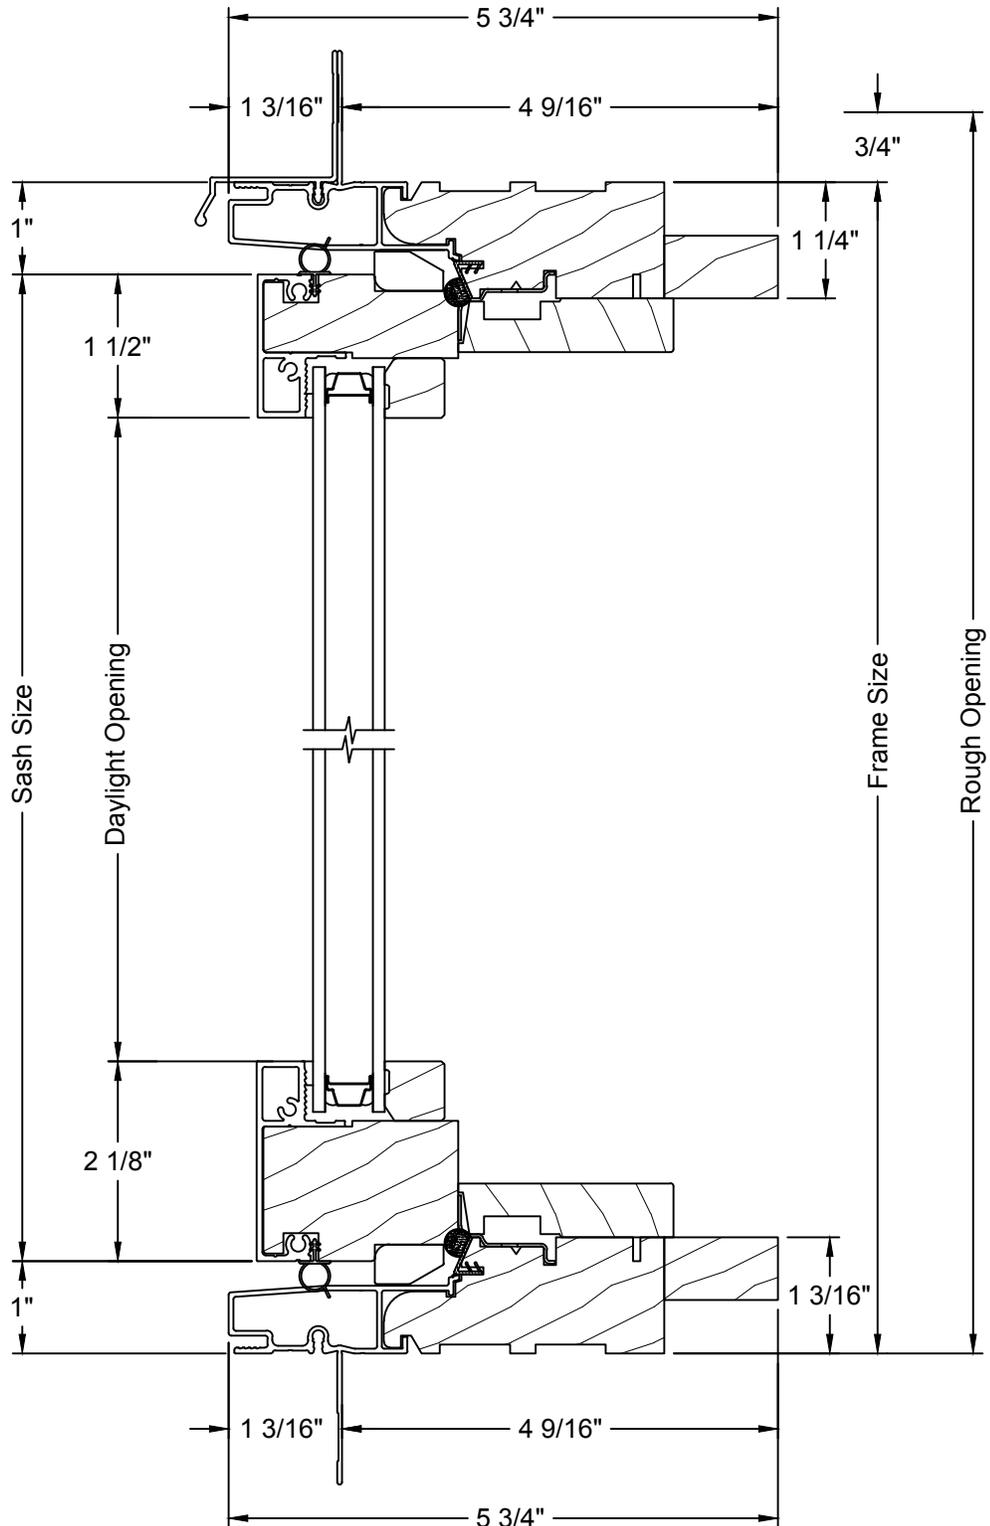




PICTURE - HORIZONTAL SECTION

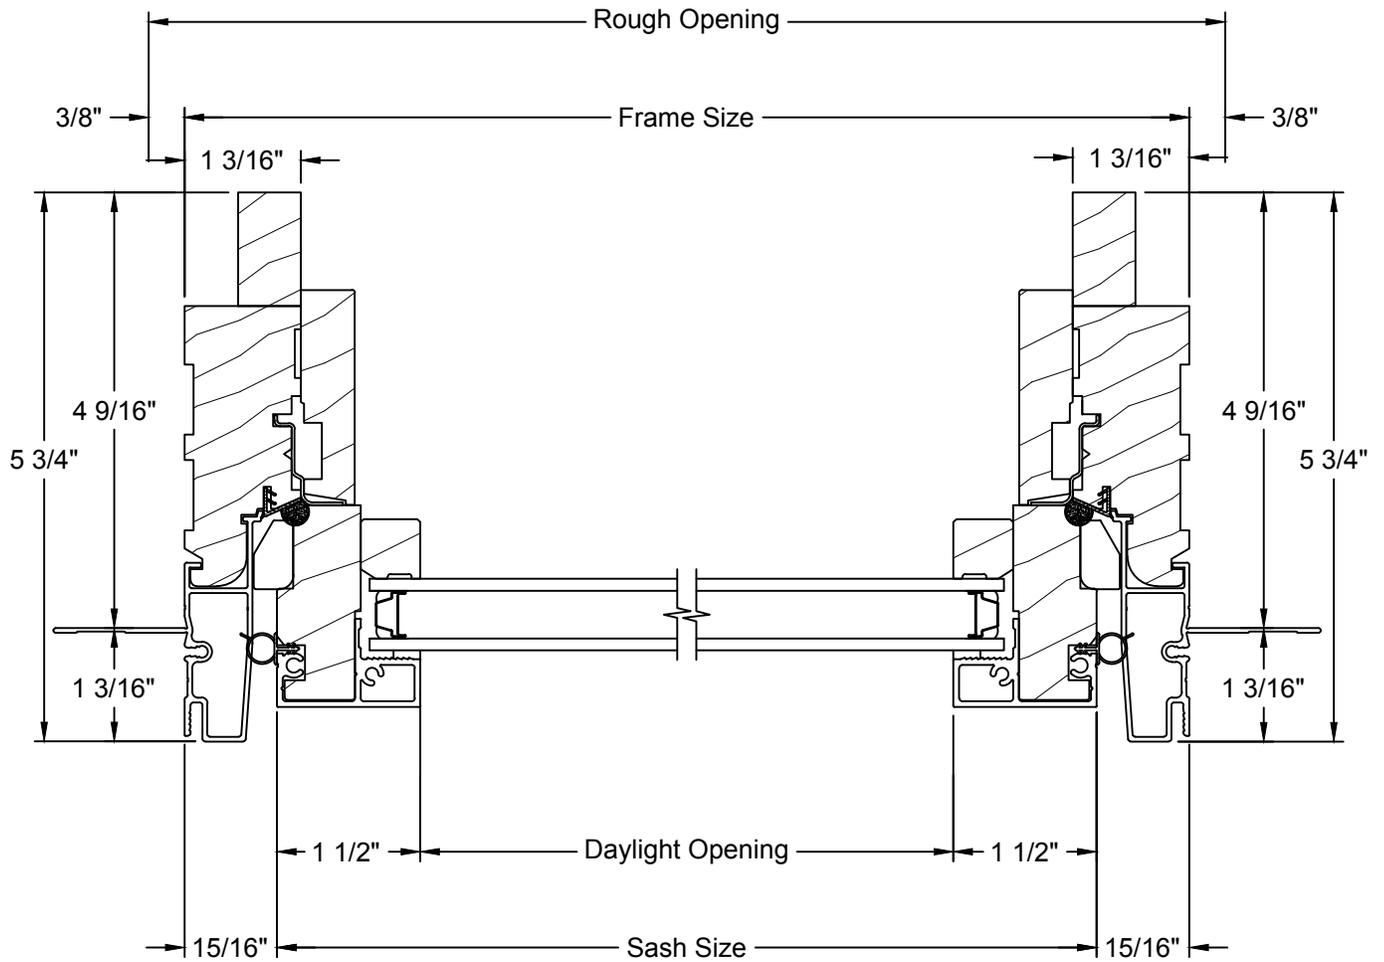



RADIUS HEAD OPERATOR - VERTICAL SECTION

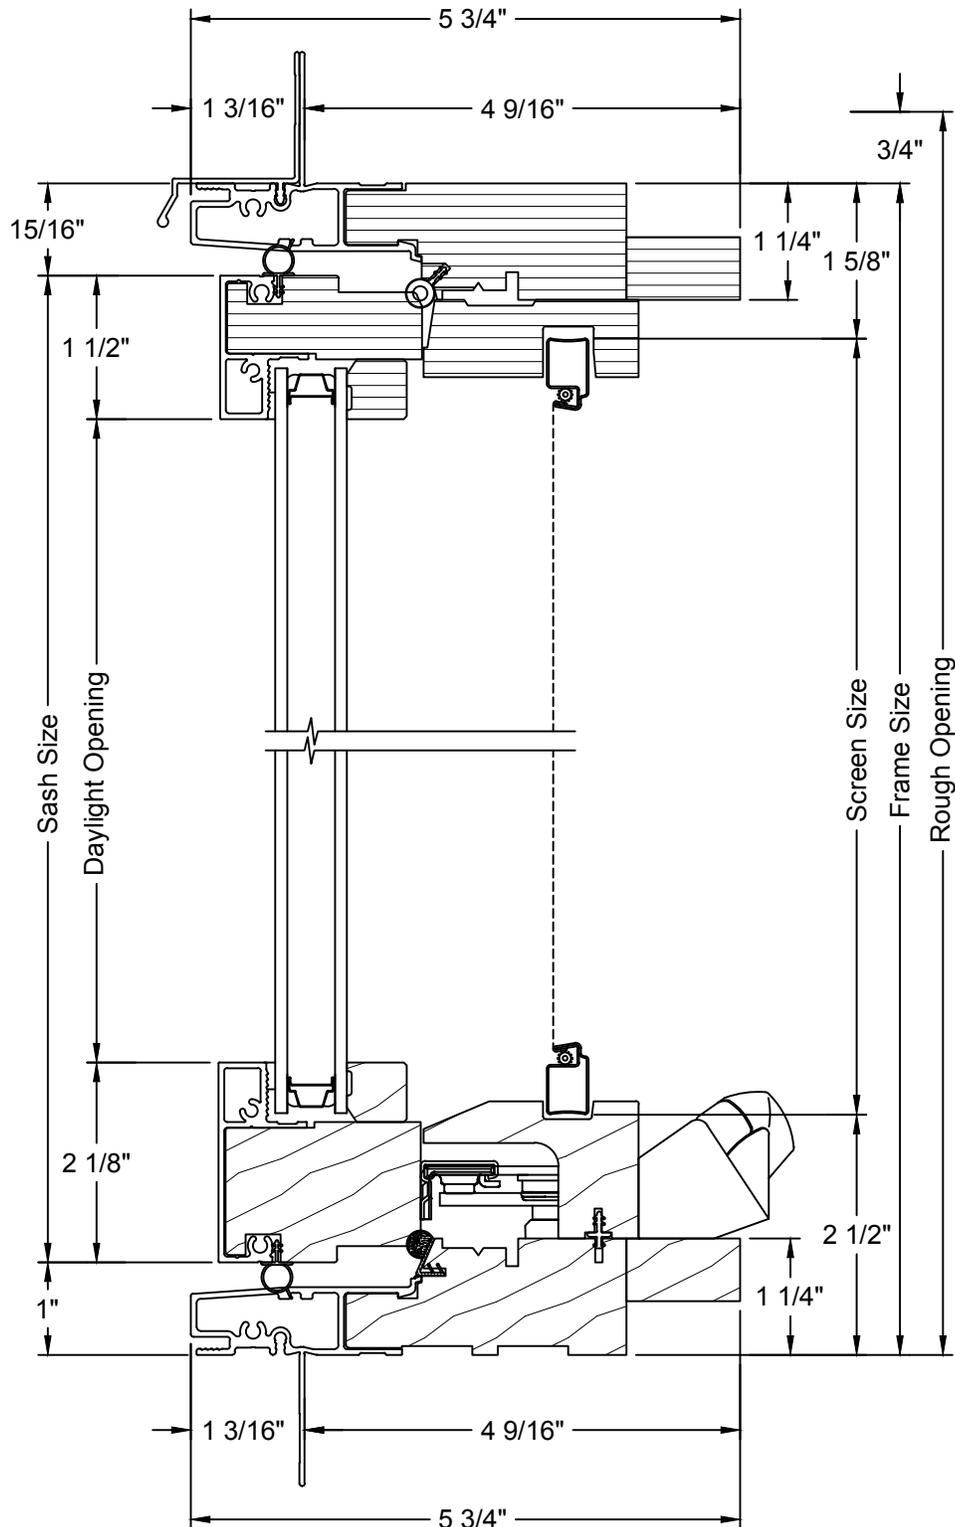



RADIUS HEAD OPERATOR - HORIZONTAL SECTION

