



TABLE OF CONTENTS

Elevations

Operator Units	2
Picture Units	17

Note:

Elevations shown DO NOT have exterior trim.

Subtract 3/4" (19) from M.O. (Masonry Opening) for Unit Sizes.

Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications.

For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



OPERATOR UNITS

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)
16 1/2"(419)							
18"(457)	CCEC1814	CCEC2014	CCEC2414	CCEC2814	CCEC3014	CCEC3214	CCEC3614
14 3/4"(375)							
14"(356)	CCEC1818	CCEC2018	CCEC2418	CCEC2818	CCEC3018	CCEC3218	CCEC3618
7 7/8"(200)							
20 1/2"(521)	CCEC1820	CCEC2020	CCEC2420	CCEC2820	CCEC3020	CCEC3220	CCEC3620
22"(559)							
18 3/4"(476)	CCEC1824	CCEC2024	CCEC2424	CCEC2824	CCEC3024	CCEC3224	CCEC3624
18"(457)							
11 7/8"(302)	CCEC1828	CCEC2028	CCEC2428	CCEC2828	CCEC3028	CCEC3228	CCEC3628
22 1/2"(572)							
24"(610)	CCEC1830	CCEC2030	CCEC2430	CCEC2830	CCEC3030	CCEC3230	CCEC3630
20 3/4"(527)							
20"(508)	CCEC1832	CCEC2032	CCEC2432	CCEC2832	CCEC3032	CCEC3232	CCEC3632
13 7/8"(352)							
26 1/2"(673)	CCEC1836	CCEC2036	CCEC2436	CCEC2836	CCEC3036	CCEC3236	CCEC3636
28"(711)							
24 3/4"(629)	CCEC1840	CCEC2040	CCEC2440	CCEC2840	CCEC3040	CCEC3240	CCEC3640
24"(610)							
17 7/8"(454)							
30 1/2"(775)							
32"(813)							
28 3/4"(730)							
28"(711)							
21 7/8"(556)							
32 1/2"(826)							
34"(864)							
30 3/4"(781)							
30"(762)							
23 7/8"(607)							
34 1/2"(876)							
36"(914)							
32 3/4"(832)							
32"(813)							
25 7/8"(657)							
38 1/2"(978)							
40"(1016)							
36 3/4"(933)							
36"(914)							
29 7/8"(759)							
42 1/2"(1080)							
44"(1118)							
40 3/4"(1035)							
40"(1016)							
33 7/8"(860)							

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S STATIONARY UNITS ONLY
 I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

44 1/2"(1130) 46 1/2"(1188) 42 3/4"(1086) 42"(1067) 35 7/8"(911)							
50 1/2"(1283) 52"(1321) 48 3/4"(1238) 48"(1219) 41 7/8"(1064)							
56 1/2"(1435) 58"(1473) 54 3/4"(1391) 54"(1372) 47 7/8"(1216)							
58 1/2"(1486) 60"(1524) 56 3/4"(1441) 56"(1422) 49 7/8"(1267)							
62 1/2"(1588) 64"(1626) 60 3/4"(1543) 60"(1524) 53 7/8"(1368)							
66 1/2"(1689) 68"(1727) 64 3/4"(1645) 64"(1626) 57 7/8"(1470)							

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)


68 1/2"(1740) 70 1/2"(1778) 66 3/4"(1695) 66 1/2"(1676) 59 7/8"(1581)									
	CCEC1866	CCEC2066	CCEC2466	CCEC2866	CCEC3066	CCEC3266	CCEC3666		
	74 1/2"(1892) 76 1/2"(1930) 72 3/4"(1848) 72 1/2"(1829) 65 7/8"(1673)								
		CCEC1872	CCEC2072	CCEC2472	CCEC2872	CCEC3072	CCEC3272	CCEC3672	
		80 1/2"(2045) 82"(2083) 78 3/4"(2000) 78 1/2"(1981) 71 7/8"(1828)							
			CCEC1878	CCEC2078	CCEC2478	CCEC2878	CCEC3078	CCEC3278	CCEC3678
			86 1/2"(2197) 88 1/2"(2235) 84 3/4"(2153) 84 1/2"(2134) 77 7/8"(1978)						
CCEC1884				CCEC2084	CCEC2484	CCEC2884	CCEC3084	CCEC3284	CCEC3684

ELEVATION SYMBOL LEGEND:
 M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S STATIONARY UNITS ONLY
 I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

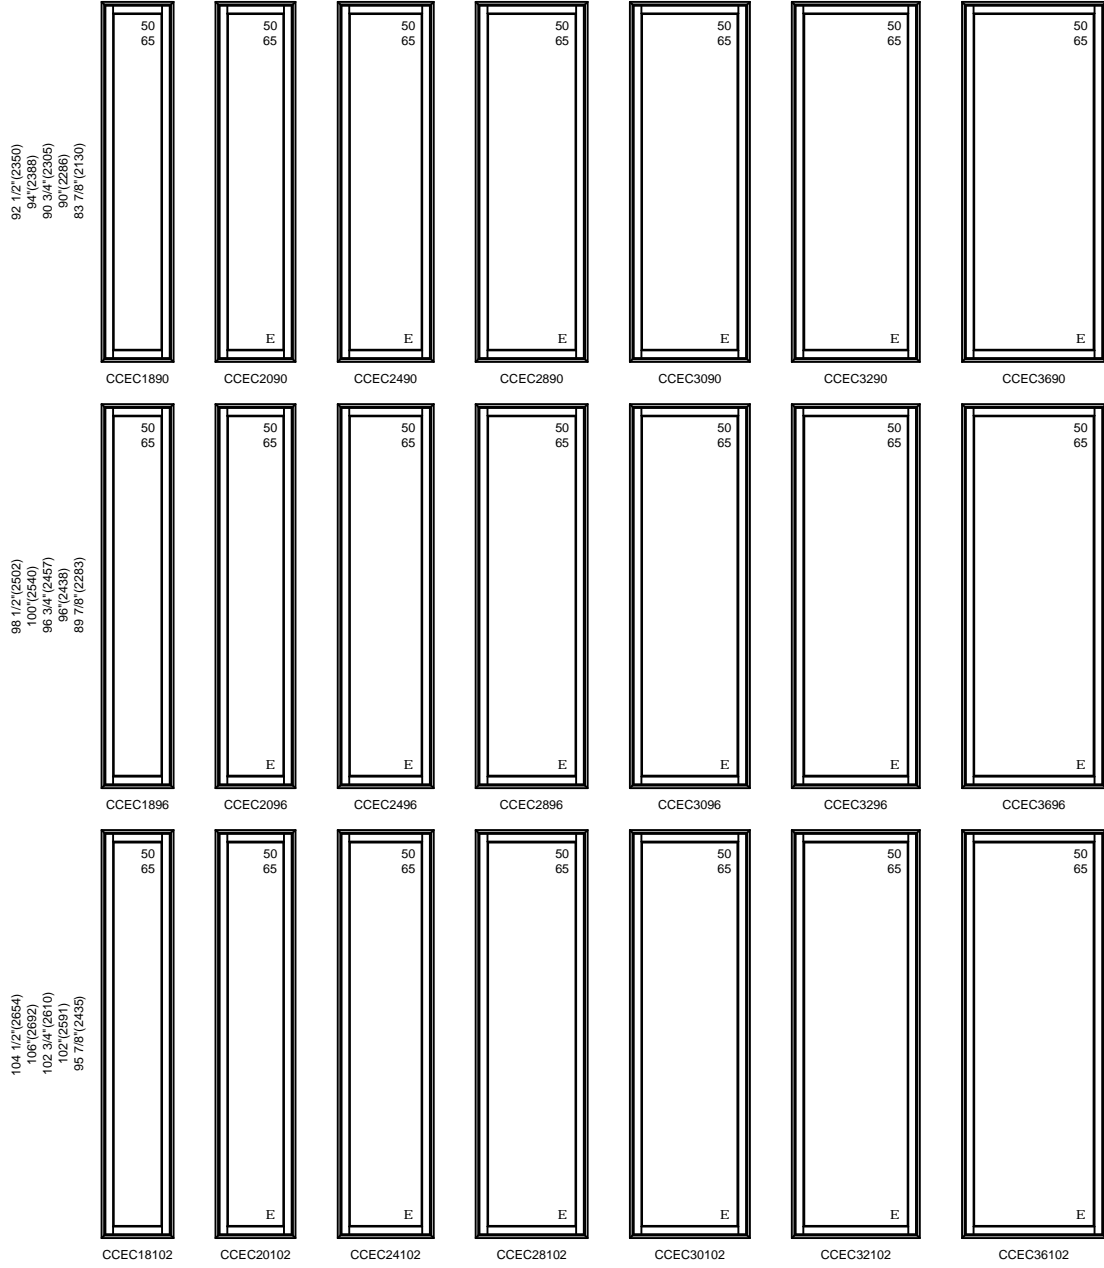


ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

110 1/2"(2807)
112"(2849)
108 3/4"(2762)
108"(2743)
101 7/8"(2588)

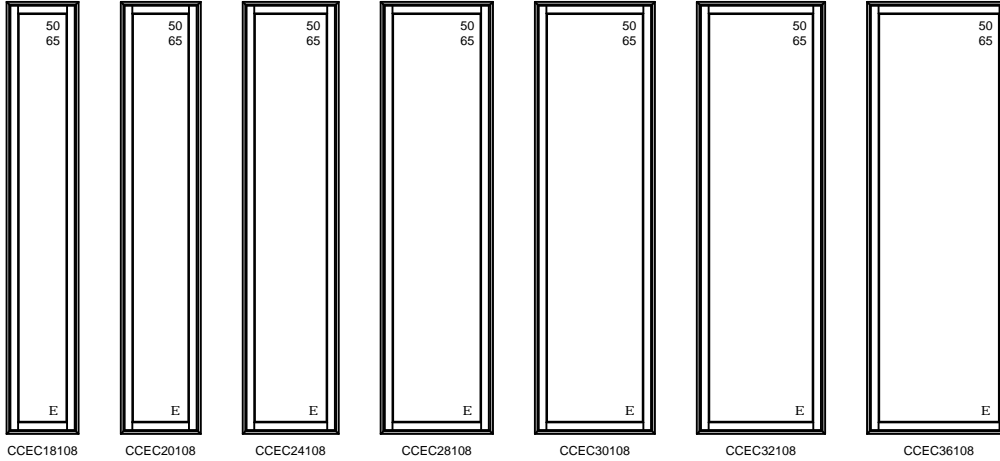

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	43 1/4"(1099)	45 1/4"(1149)	47 1/4"(1200)	51 1/4"(1302)	57 1/4"(1454)
MO FLAT CASING	46 5/16"(1176)	48 5/16"(1227)	50 5/16"(1278)	54 5/16"(1380)	60 5/16"(1532)
ROUGH OPENING	40 3/4"(1035)	42 3/4"(1086)	44 3/4"(1137)	48 3/4"(1238)	54 3/4"(1391)
FRAME SIZE	40"(1016)	42"(1067)	44"(1118)	48"(1219)	54"(1372)
DAYLIGHT OPENING	33 7/8"(860)	35 7/8"(911)	37 7/8"(962)	41 7/8"(1064)	47 7/8"(1216)
16 1/2"(419) 18"(457) 14 3/4"(375) 14"(356) 7 7/8"(200)					
	CCEC4014	CCEC4214	CCEC4414	CCEC4814	CCEC5414
20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 11 7/8"(302)					
	CCEC4018	CCEC4218	CCEC4418	CCEC4818	CCEC5418
22 1/2"(572) 24"(610) 20 3/4"(527) 20"(508) 13 7/8"(352)					
	CCEC4020	CCEC4220	CCEC4420	CCEC4820	CCEC5420
26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 17 7/8"(454)					
	CCEC4024	CCEC4224	CCEC4424	CCEC4824	CCEC5424
30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 21 7/8"(556)					
	CCEC4028	CCEC4228	CCEC4428	CCEC4828	CCEC5428
32 1/2"(826) 34"(864) 30 3/4"(781) 30"(762) 23 7/8"(607)					
	CCEC4030	CCEC4230	CCEC4430	CCEC4830	CCEC5430
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 25 7/8"(657)					
	CCEC4032	CCEC4232	CCEC4432	CCEC4832	CCEC5432
38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 29 7/8"(759)					
	CCEC4036	CCEC4236	CCEC4436	CCEC4836	CCEC5436
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)					
	CCEC4040	CCEC4240	CCEC4440	CCEC4840	CCEC5440

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1: BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S: STATIONARY UNITS ONLY
 I: IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
37 7/8"(962)


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)


44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
35 7/8"(911)




CCEC4042




CCEC4242



CCEC4442




CCEC4842




CCEC5442


50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)




CCEC4048




CCEC4248



CCEC4448




CCEC4848




CCEC5448


56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)




CCEC4054




CCEC4254



CCEC4454




CCEC4854




CCEC5454


58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)




CCEC4056




CCEC4256



CCEC4456




CCEC4856




CCEC5456


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)




CCEC4060




CCEC4260



CCEC4460




CCEC4860




CCEC5460


66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)




CCEC4064




CCEC4264



CCEC4464



CCEC4864



CCEC5464

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
37 7/8"(962)


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)


68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)




CCEC4066




CCEC4266



CCEC4466




CCEC4866




CCEC5466


74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)




CCEC4072




CCEC4272



CCEC4472




CCEC4872




CCEC5472


80 1/2"(2045)
82"(2083)
78 3/4"(2000)
78"(1981)
71 7/8"(1826)




CCEC4078




CCEC4278



CCEC4478




CCEC4878




CCEC5478


86 1/2"(2197)
88"(2235)
84 3/4"(2153)
84"(2134)
77 7/8"(1978)




CCEC4084




CCEC4284



CCEC4484



CCEC4884



CCEC5484

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
37 7/8"(962)


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)


92 1/2"(2350)
94"(2388)
90 3/4"(2305)
90"(2286)
83 7/8"(2130)




CCEC4090




CCEC4290



CCEC4490

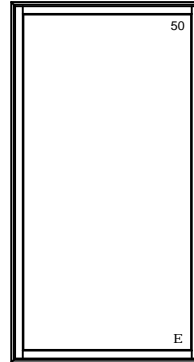


CCEC4890

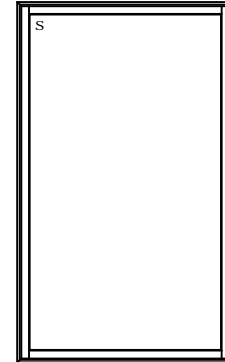


CCEC5490


98 1/2"(2502)
100"(2540)
96 3/4"(2457)
96"(2438)
89 7/8"(2283)




CCEC4096




CCEC4296



CCEC4496

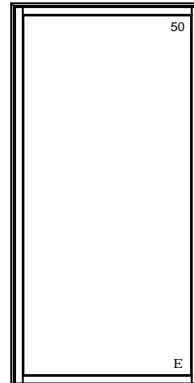


CCEC4896

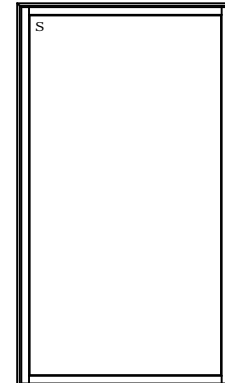


CCEC5496


104 1/2"(2654)
106"(2692)
102 3/4"(2610)
102"(2591)
95 7/8"(2435)




CCEC40102

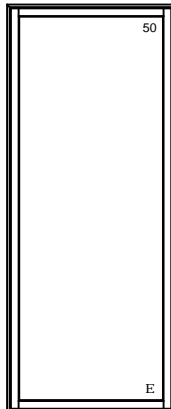


CCEC42102



CCEC44102

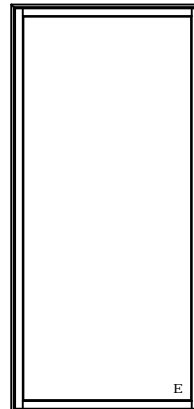

CCEC48102

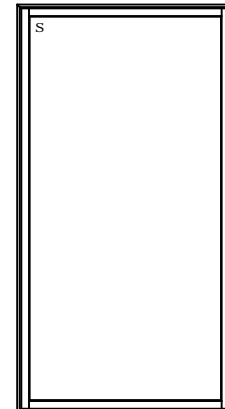

CCEC54102

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
1 IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD	43 1/4"(1099)	45 1/4"(1149)	47 1/4"(1200)	51 1/4"(1302)	57 1/4"(1454)
MO FLAT CASING	46 5/16"(1176)	48 5/16"(1227)	50 5/16"(1278)	54 5/16"(1380)	60 5/16"(1532)
ROUGH OPENING	40 3/4"(1035)	42 3/4"(1086)	44 3/4"(1137)	48 3/4"(1238)	54 3/4"(1391)
FRAME SIZE	40"(1016)	42"(1067)	44"(1118)	48"(1219)	54"(1372)
DAYLIGHT OPENING	33 7/8"(860)	35 7/8"(911)	37 7/8"(962)	41 7/8"(1064)	47 7/8"(1216)

110 1/2"(2807)
112"(2849)
108 3/4"(2762)
108"(2743)
101 7/8"(2588)

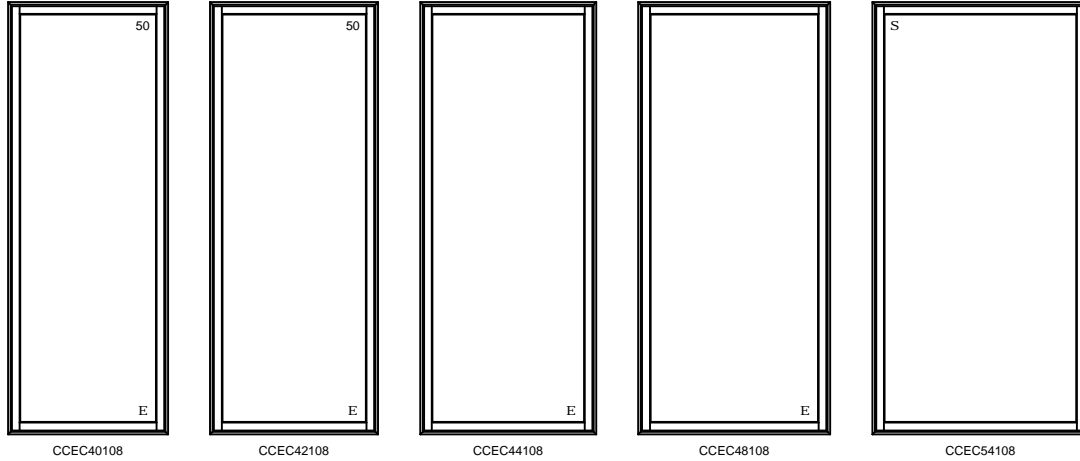

ELEVATION SYMBOL LEGEND:

M.O. = MASONRY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)

16 1/2"(419)
18"(457)
14 3/4"(375)
14"(356)
7 7/8"(200)



CCEC5614



CCEC6014

20 1/2"(521)
22"(559)
18 3/4"(476)
18"(457)
11 7/8"(302)



CCEC5618



CCEC6018

22 1/2"(572)
24 1/2"(620)
20 3/4"(527)
20"(508)
13 7/8"(352)



CCEC5620



CCEC6020

26 1/2"(673)
28 1/2"(721)
24 3/4"(629)
24 1/2"(610)
17 7/8"(454)



CCEC5624



CCEC6024

30 1/2"(775)
32 1/2"(823)
28 3/4"(730)
28 1/2"(711)
21 7/8"(556)



CCEC5628



CCEC6028

32 1/2"(826)
34 1/2"(874)
30 3/4"(781)
30 1/2"(762)
23 7/8"(607)



CCEC5630




CCEC6030

34 1/2"(876)
36 1/2"(924)
32 3/4"(831)
32 1/2"(813)
25 7/8"(657)



CCEC5632



CCEC6032

38 1/2"(978)
40 1/2"(1026)
36 3/4"(933)
36 1/2"(914)
29 7/8"(759)



CCEC5636



CCEC6036

42 1/2"(1080)
44 1/2"(1128)
40 3/4"(1035)
40 1/2"(1016)
33 7/8"(860)



CCEC5640



CCEC6040

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)



44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
35 7/8"(911)



CCEC5642

CCEC6042



50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)



CCEC5648

CCEC6048



56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)



CCEC5654

CCEC6054



58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)



CCEC5656

CCEC6056



62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)



CCEC5660

CCEC6060

66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)



CCEC5664

CCEC6064

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- F-I BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS




OPERATOR UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)

69 1/2"(1740)
70"(1778)
66 3/4"(1686)
59 7/8"(1511)




CCEC5666




CCEC6066

74 1/2"(1882)
76"(1930)
73 3/4"(1876)
65 7/8"(1673)




CCEC5672




CCEC6072

80 1/2"(2045)
82"(2083)
79 3/4"(2000)
71 7/8"(1826)




CCEC5678




CCEC6078

86 1/2"(2197)
88"(2235)
84 3/4"(2153)
77 7/8"(1976)



CCEC5684



CCEC6084

ELEVATION SYMBOL LEGEND:


- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS




OPERATOR UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

92 1/2"(2350)
94"(2388)
90 3/4"(2305)
90"(2286)
83 7/8"(2130)

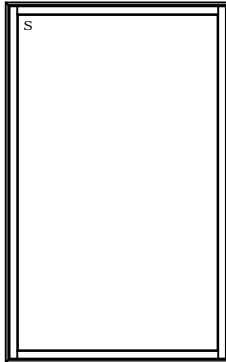


CCEC5690

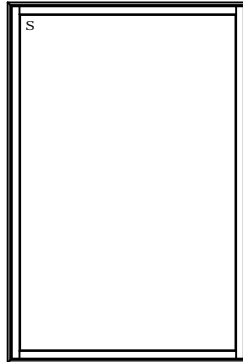


CCEC6090

98 1/2"(2502)
100"(2540)
96 3/4"(2457)
96"(2438)
89 7/8"(2283)

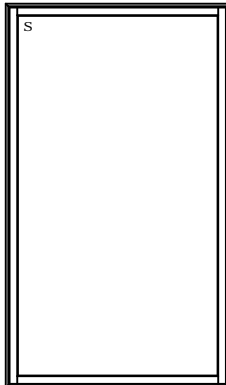


CCEC5696

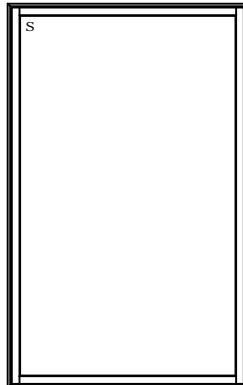


CCEC6096

104 1/2"(2654)
106"(2692)
102 3/4"(2610)
102"(2591)
95 7/8"(2435)

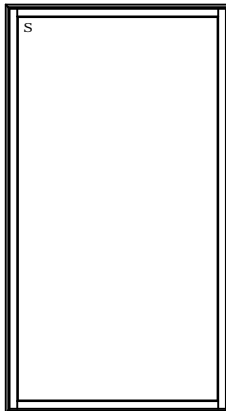

CCEC56102

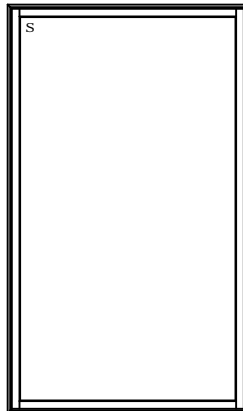

CCEC60102

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS




OPERATOR UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

110 1/2"(2807)
112"(2848)
108 3/4"(2762)
108"(2743)
101 7/8"(2588)

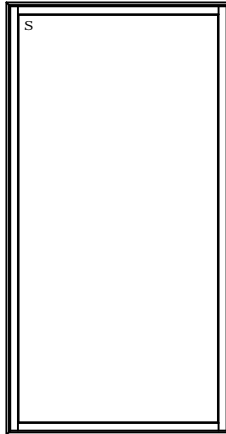

CCEC56108

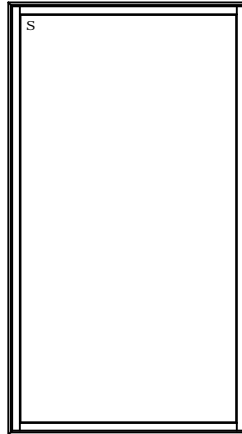

CCEC60108

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)
16 1/2"(419) 18"(457) 14 3/4"(375) 14 1/2"(368) 7 7/8"(200)							
CCEC1814	CCEC2014	CCEC2414	CCEC2814	CCEC3014	CCEC3214	CCEC3614	
20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 11 7/8"(302)							
CCEC1818	CCEC2018	CCEC2418	CCEC2818	CCEC3018	CCEC3218	CCEC3618	
22 1/2"(572) 24"(610) 20 3/4"(527) 20"(508) 13 7/8"(352)							
CCEC1820	CCEC2020	CCEC2420	CCEC2820	CCEC3020	CCEC3220	CCEC3620	
26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 17 7/8"(454)							
CCEC1824	CCEC2024	CCEC2424	CCEC2824	CCEC3024	CCEC3224	CCEC3624	
30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 21 7/8"(556)							
CCEC1828	CCEC2028	CCEC2428	CCEC2828	CCEC3028	CCEC3228	CCEC3628	
32 1/2"(826) 34"(864) 30 3/4"(781) 30"(762) 23 7/8"(607)							
CCEC1830	CCEC2030	CCEC2430	CCEC2830	CCEC3030	CCEC3230	CCEC3630	
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 25 7/8"(657)							
CCEC1832	CCEC2032	CCEC2432	CCEC2832	CCEC3032	CCEC3232	CCEC3632	
38 1/2"(976) 40"(1014) 36 3/4"(933) 36"(914) 29 7/8"(759)							
CCEC1836	CCEC2036	CCEC2436	CCEC2836	CCEC3036	CCEC3236	CCEC3636	
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)							
CCEC1840	CCEC2040	CCEC2440	CCEC2840	CCEC3040	CCEC3240	CCEC3640	

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)
44 1/2"(1130)							
46"(1168)							
42 3/4"(1086)							
42"(1067)							
35 7/8"(911)							
	CCEC1842	CCEC2042	CCEC2442	CCEC2842	CCEC3042	CCEC3242	CCEC3642
50 1/2"(1283)							
52"(1321)							
48 3/4"(1238)							
48"(1219)							
41 7/8"(1064)							
	CCEC1848	CCEC2048	CCEC2448	CCEC2848	CCEC3048	CCEC3248	CCEC3648
56 1/2"(1438)							
58"(1473)							
54 3/4"(1391)							
54"(1372)							
47 7/8"(1216)							
	CCEC1854	CCEC2054	CCEC2454	CCEC2854	CCEC3054	CCEC3254	CCEC3654
58 1/2"(1468)							
60"(1524)							
56 3/4"(1441)							
56"(1422)							
49 7/8"(1267)							
	CCEC1856	CCEC2056	CCEC2456	CCEC2856	CCEC3056	CCEC3256	CCEC3656
62 1/2"(1588)							
64"(1626)							
60 3/4"(1543)							
60"(1524)							
53 7/8"(1369)							
	CCEC1860	CCEC2060	CCEC2460	CCEC2860	CCEC3060	CCEC3260	CCEC3660
66 1/2"(1688)							
68"(1727)							
64 3/4"(1645)							
64"(1626)							
57 7/8"(1470)							
	CCEC1864	CCEC2064	CCEC2464	CCEC2864	CCEC3064	CCEC3264	CCEC3664

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
11 7/8"(302)

23 1/4"(591)
27 5/16"(694)
20 3/4"(527)
20"(508)
13 7/8"(352)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
17 7/8"(454)


31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
21 7/8"(556)

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
23 7/8"(607)


35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
25 7/8"(657)

39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
29 7/8"(759)

68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)



CCEC1866




CCEC2066



CCEC2466




CCEC2866



CCEC3066




CCEC3266




CCEC3666

74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)



CCEC1872




CCEC2072



CCEC2472




CCEC2872



CCEC3072




CCEC3272




CCEC3672

80 1/2"(2045)
82"(2083)
78 3/4"(2000)
78"(1981)
71 7/8"(1828)



CCEC1878




CCEC2078



CCEC2478




CCEC2878



CCEC3078




CCEC3278




CCEC3678

86 1/2"(2197)
88"(2235)
84 3/4"(2153)
84"(2134)
77 7/8"(1978)



CCEC1884




CCEC2084




CCEC2484




CCEC2884



CCEC3084



CCEC3284



CCEC3684

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

21 1/4"(540)
24 5/16"(618)
18 3/4"(476)
18"(457)
11 7/8"(302)

23 1/4"(591)
27 5/16"(694)
20 3/4"(527)
20"(508)
13 7/8"(352)

27 1/4"(692)
30 5/16"(770)
24 3/4"(629)
24"(610)
17 7/8"(454)


31 1/4"(794)
34 5/16"(872)
28 3/4"(730)
28"(711)
21 7/8"(556)

33 1/4"(845)
36 5/16"(922)
30 3/4"(781)
30"(762)
23 7/8"(607)


35 1/4"(895)
38 5/16"(973)
32 3/4"(832)
32"(813)
25 7/8"(657)

39 1/4"(997)
42 5/16"(1075)
36 3/4"(933)
36"(914)
29 7/8"(759)


92 1/2"(2350)
94"(2388)
90 3/4"(2305)
90"(2286)
83 7/8"(2130)




CCEC1890




CCEC2090




CCEC2490




CCEC2890



CCEC3090




CCEC3290




CCEC3690


98 1/2"(2502)
100"(2540)
96 3/4"(2457)
96"(2438)
89 7/8"(2283)




CCEC1896




CCEC2096




CCEC2496




CCEC2896



CCEC3096




CCEC3296




CCEC3696


104 1/2"(2654)
106"(2692)
102 3/4"(2610)
102"(2591)
95 7/8"(2435)




CCEC18102




CCEC20102




CCEC24102




CCEC28102



CCEC30102



CCEC32102



CCEC36102


ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD	21 1/4"(540)	23 1/4"(591)	27 1/4"(692)	31 1/4"(794)	33 1/4"(845)	35 1/4"(895)	39 1/4"(997)
MO FLAT CASING	24 5/16"(618)	27 5/16"(694)	30 5/16"(770)	34 5/16"(872)	36 5/16"(922)	38 5/16"(973)	42 5/16"(1075)
ROUGH OPENING	18 3/4"(476)	20 3/4"(527)	24 3/4"(629)	28 3/4"(730)	30 3/4"(781)	32 3/4"(832)	36 3/4"(933)
FRAME SIZE	18"(457)	20"(508)	24"(610)	28"(711)	30"(762)	32"(813)	36"(914)
DAYLIGHT OPENING	11 7/8"(302)	13 7/8"(352)	17 7/8"(454)	21 7/8"(556)	23 7/8"(607)	25 7/8"(657)	29 7/8"(759)

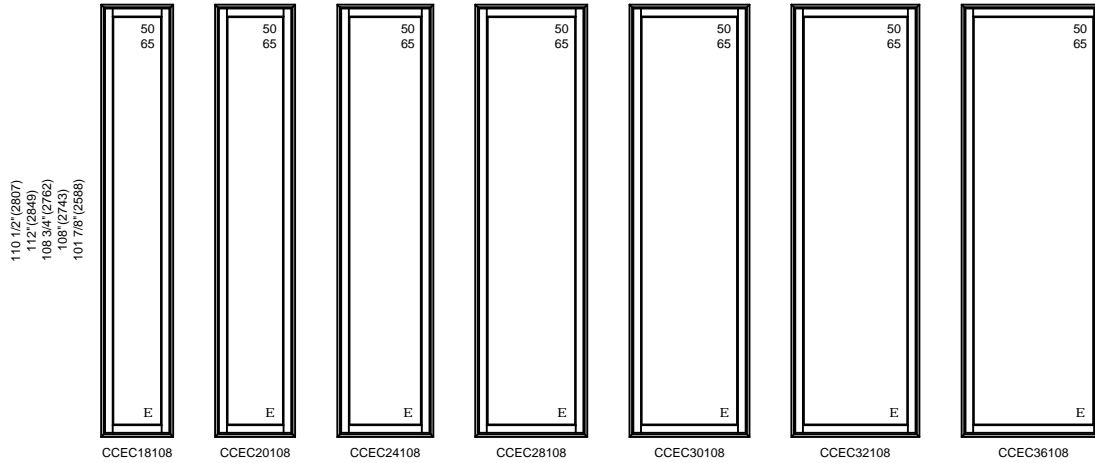

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S STATIONARY UNITS ONLY
 I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

MO BRICKMOLD MO FLAT CASING ROUGH OPENING FRAME SIZE DAYLIGHT OPENING	43 1/4"(1099) 46 5/16"(1176) 40 3/4"(1035) 40"(1016) 33 7/8"(860)	45 1/4"(1149) 48 5/16"(1227) 42 3/4"(1086) 42"(1067) 35 7/8"(911)	47 1/4"(1200) 50 5/16"(1278) 44 3/4"(1137) 44"(1118) 37 7/8"(962)	51 1/4"(1302) 54 5/16"(1380) 48 3/4"(1238) 48"(1219) 41 7/8"(1064)	57 1/4"(1454) 60 5/16"(1532) 54 3/4"(1391) 54"(1372) 47 7/8"(1216)
16 1/2"(419) 18"(457) 14 3/4"(375) 14"(356) 7 7/8"(200)					
20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 11 7/8"(302)					
22 1/2"(572) 24"(610) 20 3/4"(527) 20"(508) 13 7/8"(352)					
26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 17 7/8"(454)					
30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 21 7/8"(556)					
32 1/2"(826) 34"(864) 30 3/4"(781) 30"(762) 23 7/8"(607)					
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 25 7/8"(657)					
38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 29 7/8"(759)					
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)					

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
37 7/8"(962)


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)


44 1/2"(1130)
46"(1168)
42 3/4"(1066)
42"(1067)
35 7/8"(911)




CCEC4042




CCEC4242



CCEC4442




CCEC4842




CCEC5442


50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)




CCEC4048




CCEC4248



CCEC4448




CCEC4848




CCEC5448


56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)




CCEC4054




CCEC4254



CCEC4454




CCEC4854




CCEC5454


58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)




CCEC4056




CCEC4256



CCEC4456




CCEC4856




CCEC5456


62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)




CCEC4060




CCEC4260



CCEC4460




CCEC4860




CCEC5460


66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)




CCEC4064




CCEC4264



CCEC4464



CCEC4864



CCEC5464

ELEVATION SYMBOL LEGEND:


- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS




PICTURE UNITS

MO BRICKMOLD	43 1/4"(1099)	45 1/4"(1149)	47 1/4"(1200)	51 1/4"(1302)	57 1/4"(1454)
MO FLAT CASING	46 5/16"(1176)	48 5/16"(1227)	50 5/16"(1278)	54 5/16"(1380)	60 5/16"(1532)
ROUGH OPENING	40 3/4"(1035)	42 3/4"(1086)	44 3/4"(1137)	48 3/4"(1238)	54 3/4"(1391)
FRAME SIZE	40"(1016)	42"(1067)	44"(1118)	48"(1219)	54"(1372)
DAYLIGHT OPENING	33 7/8"(860)	35 7/8"(911)	37 7/8"(962)	41 7/8"(1064)	47 7/8"(1216)


68 1/2"(1740)
70"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)




CCEC4066




CCEC4266



CCEC4466




CCEC4866




CCEC5466


74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)




CCEC4072




CCEC4272



CCEC4472




CCEC4872




CCEC5472


80 1/2"(2045)
82"(2083)
78 3/4"(2000)
78"(1981)
71 7/8"(1826)




CCEC4078




CCEC4278



CCEC4478




CCEC4878




CCEC5478


86 1/2"(2197)
88"(2235)
84 3/4"(2153)
84"(2134)
77 7/8"(1978)




CCEC4084




CCEC4284



CCEC4484



CCEC4884



CCEC5484

ELEVATION SYMBOL LEGEND:

M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING

43 1/4"(1099)
46 5/16"(1176)
40 3/4"(1035)
40"(1016)
33 7/8"(860)


45 1/4"(1149)
48 5/16"(1227)
42 3/4"(1086)
42"(1067)
35 7/8"(911)

47 1/4"(1200)
50 5/16"(1278)
44 3/4"(1137)
44"(1118)
37 7/8"(962)


51 1/4"(1302)
54 5/16"(1380)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)

57 1/4"(1454)
60 5/16"(1532)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)


82 1/2"(2350)
94"(2388)
90 3/4"(2305)
90"(2286)
83 7/8"(2130)




CCEC4090




CCEC4290



CCEC4490

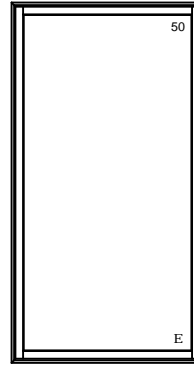


CCEC4890

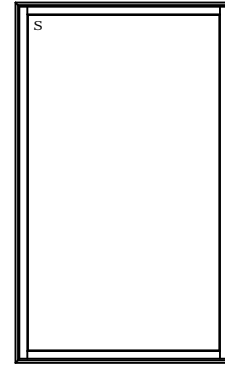


CCEC5490


98 1/2"(2502)
100"(2540)
96 3/4"(2457)
96"(2438)
89 7/8"(2283)




CCEC4096




CCEC4296



CCEC4496

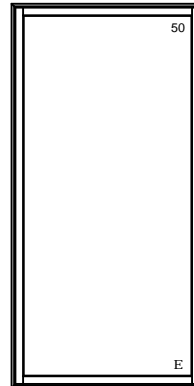


CCEC4896

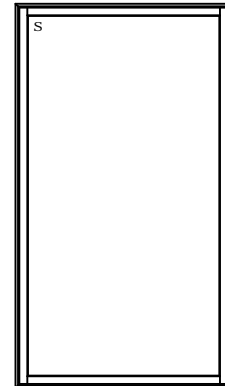


CCEC5496


104 1/2"(2654)
106"(2692)
102 3/4"(2610)
102"(2591)
95 7/8"(2435)




CCEC40102

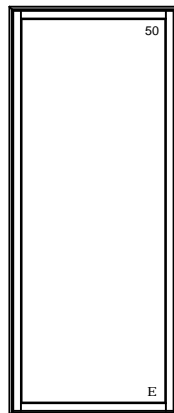


CCEC42102



CCEC44102

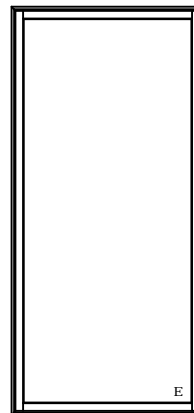

CCEC48102

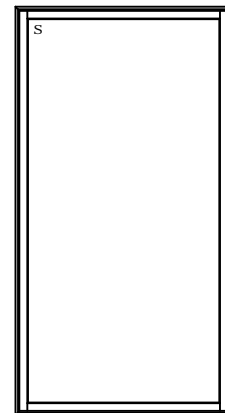

CCEC54102

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD	43 1/4"(1099)	45 1/4"(1149)	47 1/4"(1200)	51 1/4"(1302)	57 1/4"(1454)
MO FLAT CASING	46 5/16"(1176)	48 5/16"(1227)	50 5/16"(1278)	54 5/16"(1380)	60 5/16"(1532)
ROUGH OPENING	40 3/4"(1035)	42 3/4"(1086)	44 3/4"(1137)	48 3/4"(1238)	54 3/4"(1391)
FRAME SIZE	40"(1016)	42"(1067)	44"(1118)	48"(1219)	54"(1372)
DAYLIGHT OPENING	33 7/8"(860)	35 7/8"(911)	37 7/8"(962)	41 7/8"(1064)	47 7/8"(1216)

110 1/2"(2807)
112"(2849)
108 3/4"(2762)
108"(2743)
101 7/8"(2588)

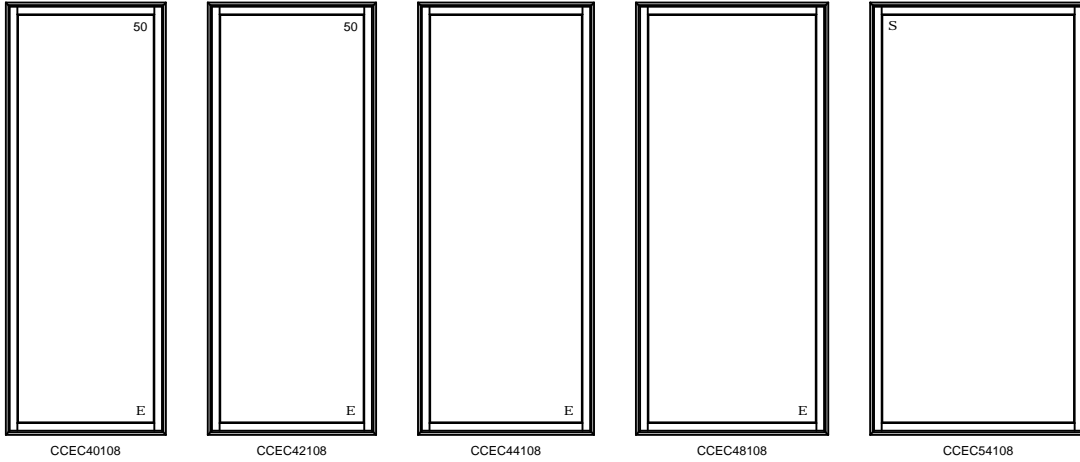

ELEVATION SYMBOL LEGEND:
M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

16 1/2"(419) 18"(457) 14 3/4"(375) 7 7/8"(200)		
	CCEC5614	CCEC6014
20 1/2"(521) 22"(559) 18 3/4"(476) 18"(457) 11 7/8"(302)		
	CCEC5618	CCEC6018
22 1/2"(572) 24"(610) 20 3/4"(527) 20"(508) 13 7/8"(352)		
	CCEC5620	CCEC6020
26 1/2"(673) 28"(711) 24 3/4"(629) 24"(610) 17 7/8"(454)		
	CCEC5624	CCEC6024
30 1/2"(775) 32"(813) 28 3/4"(730) 28"(711) 21 7/8"(566)		
	CCEC5628	CCEC6028
32 1/2"(826) 34"(884) 30 3/4"(781) 30"(762) 23 7/8"(607)		
	CCEC5630	CCEC6030
34 1/2"(876) 36"(914) 32 3/4"(832) 32"(813) 25 7/8"(657)		
	CCEC5632	CCEC6032
38 1/2"(978) 40"(1016) 36 3/4"(933) 36"(914) 29 7/8"(759)		
	CCEC5636	CCEC6036
42 1/2"(1080) 44"(1118) 40 3/4"(1035) 40"(1016) 33 7/8"(860)		
	CCEC5640	CCEC6040

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
 VALUES IN () ARE IN MILLIMETER CONVERSIONS
 E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
 E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
 ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
 S STATIONARY UNITS ONLY
 I IMPACT RATED UNITS



PICTURE UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

44 1/2"(1130)
46"(1168)
42 3/4"(1086)
42"(1067)
35 7/8"(911)




CCEC5642




CCEC6042

50 1/2"(1283)
52"(1321)
48 3/4"(1238)
48"(1219)
41 7/8"(1064)




CCEC5648




CCEC6048

56 1/2"(1435)
58"(1473)
54 3/4"(1391)
54"(1372)
47 7/8"(1216)




CCEC5654




CCEC6054

58 1/2"(1486)
60"(1524)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)




CCEC5656




CCEC6056

62 1/2"(1588)
64"(1626)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)




CCEC5660




CCEC6060

66 1/2"(1689)
68"(1727)
64 3/4"(1645)
64"(1626)
57 7/8"(1470)



CCEC5664



CCEC6064

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS




PICTURE UNITS

MO BRICKMOLD
MO FLAT CASING
ROUGH OPENING
FRAME SIZE
DAYLIGHT OPENING


59 1/4"(1505)
62 5/16"(1583)
56 3/4"(1441)
56"(1422)
49 7/8"(1267)

63 1/4"(1607)
66 5/16"(1684)
60 3/4"(1543)
60"(1524)
53 7/8"(1368)

68 1/2"(1740)
70 1/4"(1778)
66 3/4"(1695)
66"(1676)
59 7/8"(1581)




CCEC5666




CCEC6066

74 1/2"(1892)
76"(1930)
72 3/4"(1848)
72"(1829)
65 7/8"(1673)




CCEC5672




CCEC6072

80 1/2"(2045)
82"(2083)
78 3/4"(2000)
78"(1981)
71 7/8"(1826)




CCEC5678




CCEC6078

86 1/2"(2197)
88"(2235)
84 3/4"(2153)
84"(2134)
77 7/8"(1978)



CCEC5684



CCEC6084

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS




PICTURE UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

92 1/2"(2350)
94"(2388)
90 3/4"(2305)
90"(2286)
83 7/8"(2130)

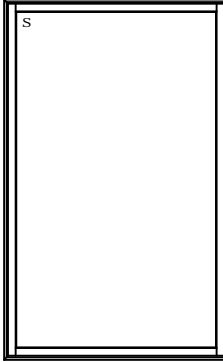


CCEC5690

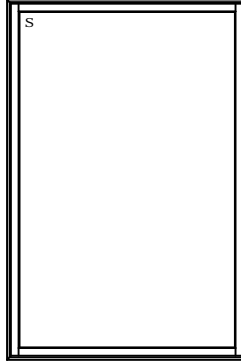


CCEC6090

98 1/2"(2502)
100"(2540)
96 3/4"(2457)
96"(2438)
89 7/8"(2283)

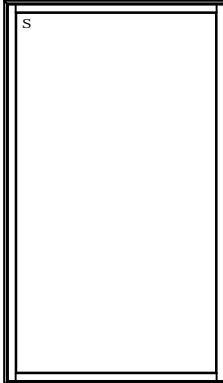


CCEC5696

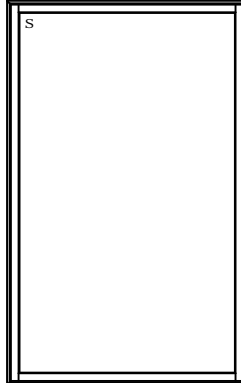


CCEC6096

104 1/2"(2654)
106"(2692)
102 3/4"(2610)
102"(2591)
95 7/8"(2435)

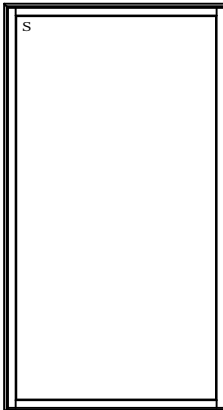

CCEC56102

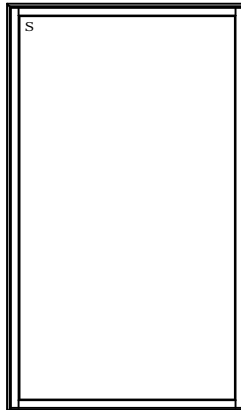

CCEC60102

ELEVATION SYMBOL LEGEND:


M.O. = MASORNY OPENING
VALUES IN () ARE IN MILLIMETER CONVERSIONS
E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
S STATIONARY UNITS ONLY
I IMPACT RATED UNITS




PICTURE UNITS

MO BRICKMOLD	59 1/4"(1505)	63 1/4"(1607)
MO FLAT CASING	62 5/16"(1583)	66 5/16"(1684)
ROUGH OPENING	56 3/4"(1441)	60 3/4"(1543)
FRAME SIZE	56"(1422)	60"(1524)
DAYLIGHT OPENING	49 7/8"(1267)	53 7/8"(1368)

110 1/2"(2807)
112"(2849)
108 3/4"(2762)
108"(2743)
101 7/8"(2588)

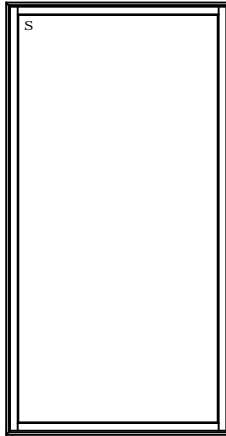

CCEC56108

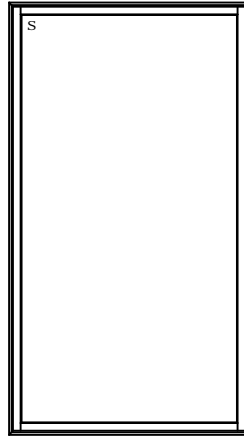

CCEC60108

ELEVATION SYMBOL LEGEND:

- M.O. = MASORNY OPENING
- VALUES IN () ARE IN MILLIMETER CONVERSIONS
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT., FOR SECOND FLOOR AND ABOVE EGRESS
- E1 BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.0 SQ. FT., FOR FIRST FLOOR EGRESS
- ## NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING
- S STATIONARY UNITS ONLY
- I IMPACT RATED UNITS