



TABLE OF CONTENTS


Elevations

Operator Units	2
Picture Units	4
Transom Units	5



OPERATOR UNITS

MO BRICKMOLD	35 7/16"(900)	47 7/16"(1205)	59 7/16"(1510)	71 7/16"(1815)
MO FLAT CASING	38 1/2"(978)	50 1/2"(1283)	62 1/2"(1588)	74 1/2"(1892)
ROUGH OPENING	32 15/16"(837)	44 15/16"(1141)	56 15/16"(1446)	68 15/16"(1751)
FRAME SIZE	32 3/16"(818)	44 3/16"(1122)	56 3/16"(1427)	68 3/16"(1732)
DAYLIGHT OPENING	22 5/16"(578)	34 5/16"(872)	46 5/16"(1176)	58 5/16"(1481)

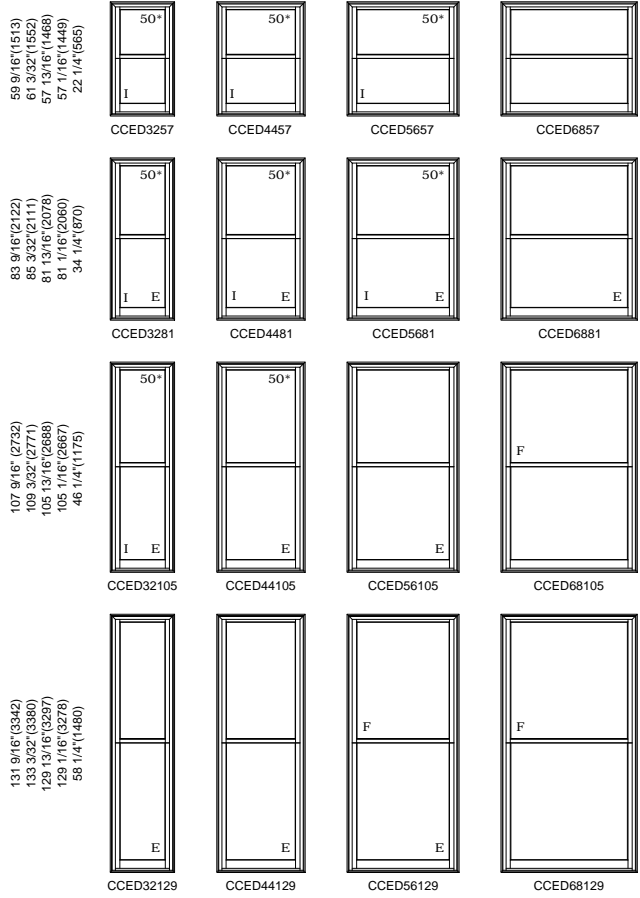

ELEVATION SYMBOL LEGEND:


- VALUES IN () ARE IN MILLIMETER CONVERSIONS.
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- F SASH TRAVEL RESTRICTED, UPPER SASH FIXED.
- # NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING.
- I INDICATES IMPACT RATED
- ALL OPERABLE UNITS ARE AVAILABLE IN A SINGLE-HUNG CONFIGURATION WITH A FIXED UPPER SASH.

Note: Elevations shown include brickmould. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



OPERATOR UNITS

MO BRICKMOLD	35 7/16"(900)	47 7/16"(1205)	59 7/16"(1510)	71 7/16"(1815)
MO FLAT CASING	38 1/2"(978)	50 1/2"(1283)	62 1/2"(1588)	74 1/2"(1892)
ROUGH OPENING	32 15/16"(837)	44 15/16"(1141)	56 15/16"(1446)	68 15/16"(1751)
FRAME SIZE	32 3/16"(818)	44 3/16"(1122)	56 3/16"(1427)	68 3/16"(1732)
DAYLIGHT OPENING	22 5/16"(567)	34 5/16"(872)	46 5/16"(1176)	58 5/16"(1481)

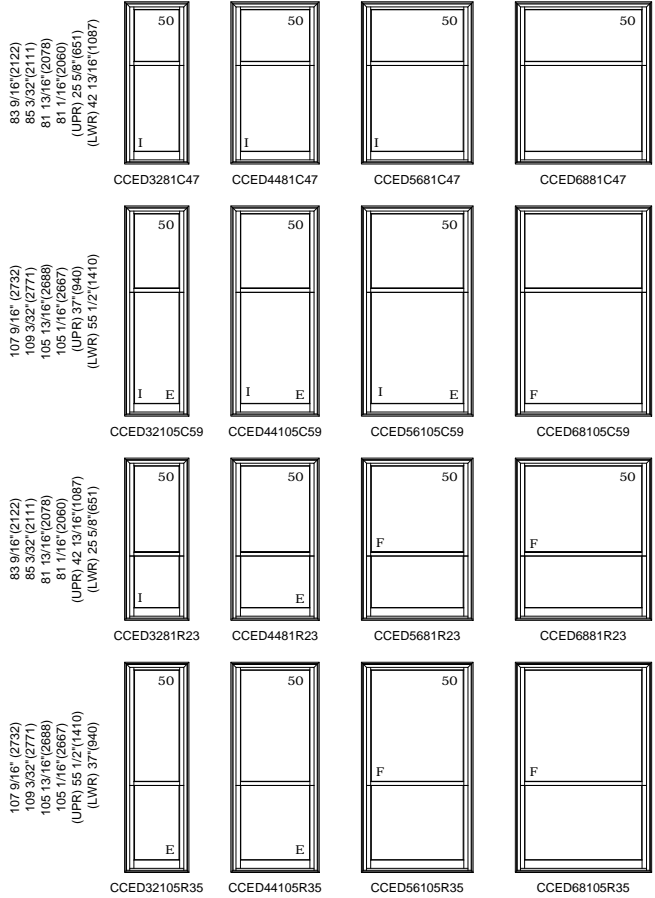

ELEVATION SYMBOL LEGEND:

- VALUES IN () ARE IN MILLIMETER CONVERSIONS.
- E BASIC UNIT CLEAR OPENING EXCEEDS 20" IN WIDTH, 24" IN HEIGHT & A MINIMUM OF 5.7 SQ. FT.
- F SASH TRAVEL RESTRICTED, UPPER SASH FIXED.
- # PERFORMANCE INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING.
- I INDICATES IMPACT RATED
- ALL OPERABLE UNITS ARE AVAILABLE IN A SINGLE-HUNG CONFIGURATION WITH A FIXED UPPER SASH.

Note: Elevations shown include brickmold. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.




PICTURE UNITS

MO BRICKMOLD	35 7/16"(900)	47 7/16"(1205)	59 7/16"(1510)	71 7/16"(1815)
MO FLAT CASING	38 1/2"(978)	50 1/2"(1283)	62 1/2"(1588)	74 1/2"(1892)
ROUGH OPENING	32 15/16"(837)	44 15/16"(1141)	56 15/16"(1446)	68 15/16"(1751)
FRAME SIZE	32 3/16"(818)	44 3/16"(1122)	56 3/16"(1427)	68 3/16"(1732)
DAYLIGHT OPENING	22 5/16"(567)	34 5/16"(872)	46 5/16"(1176)	58 5/16"(1481)


59 1/8"(1502)
60 5/8"(1540)
57 1/16"(1449)
44 7/16"(1129)




CCEDP3257



CCEDP4457



CCEDP5657




CCEDP6857


83 1/8"(2111)
84 5/8"(2149)
81 13/16"(2078)
70 5/8"(1766)




CCEDP3281



CCEDP4481



CCEDP5681




CCEDP6881


107 1/8"(2721)
108 5/8"(2759)
105 13/16"(2688)
94 5/8"(2403)




CCEDP32105



CCEDP44105



CCEDP56105




CCEDP68105


131 1/8"(3331)
132 5/8"(3369)
129 13/16"(3297)
129 1/16"(3278)
118 5/8"(3013)




CCEDP32129



CCEDP44129



CCEDP56129



CCEDP68129

ELEVATION SYMBOL LEGEND:
VALUES IN () ARE IN MILLIMETER CONVERSIONS.
NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING.

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.



TRANSOM UNITS

MO BRICKMOLD	35 7/16"(900)	47 7/16"(1205)	59 7/16"(1510)	71 7/16"(1815)
MO FLAT CASING	38 1/2"(980)	50 1/2"(1283)	62 1/2"(1588)	74 1/2"(1892)
ROUGH OPENING	32 15/16"(837)	44 15/16"(1141)	56 15/16"(1446)	68 15/16"(1751)
FRAME SIZE	32 3/16"(818)	44 3/16"(1122)	56 3/16"(1427)	68 3/16"(1732)
DAYLIGHT OPENING	22 5/16"(567)	34 5/16"(872)	46 5/16"(1176)	58 5/16"(1481)

34 11/16"(881) 36 3/16"(919) 38 3/8"(848) 32 5/8"(829) 22 9/32"(566)				
46 11/16"(1186) 48 3/16"(1224) 45 3/8"(1153) 44 5/8"(1133) 34 9/32"(871)				
58 11/16"(1481) 60 3/16"(1529) 57 3/8"(1457) 56 5/8"(1438) 46 9/32"(1176)				
70 11/16"(1795) 72 3/16"(1834) 68 3/8"(1762) 68 5/8"(1743) 58 9/32"(1480)				

ELEVATION SYMBOL LEGEND:

VALUES IN () ARE IN MILLIMETER CONVERSIONS.

- ##* NUMBER INDICATES PERFORMANCE GRADE (PG) RATING WITH STANDARD GLAZING.
- I INDICATES IMPACT RATED

Note: Elevations shown DO NOT have exterior trim. Subtract 1/2"(12.7) from M.O.(Masonry Opening) for Unit Sizes. Masonry openings above include Sill Nose, see Trim Options page for Sill Nose specifications. For other Trim Options refer to the Unit Sizing, Rough Opening & Masonry Openings page.